

MUHAMMED'S MARKS MM INTERNATIONAL PROVIDER CO., LTD

228 SHANGCHENG AVENUE, FUTIAN STREET, YIWU CITY, CHINA

Phone / WhatsApp / WeChat: +86 150 6791 4140

Website: mmarkstrade.com

()



Email: info@mmarkstrade.com



COMPANY PROFILE

Founded in 1996, MM provider has become a specialized outdoor lighting manufacturer with integrated capabilities of R&D, design, production, and sales. Derived from the eternal pursuit of nature and light. The company is located in Henglan Town, Zhongshan City, a major lighting manufacturing town in China, and has attained ISO9001 international standard of quality management system. Our products have passed a series of certifications, including CCC, CE, ROHS, ETL, CETL. MMProvider integrates both Eastern and Western designs, offering an array of products fashioned in classic to modern styles. The wide range of products includes street lamps, landscape lamps, garden lights, wall lights, lawn lights and pillar lamps, being used in diverse scenes such as urban paths, high-end apartments, squares, parks, and residential gardens. Over the years, Daheng has fostered strong relationships with real estate developers, design institutes, and construction companies, exporting products to Europe, America, Middle East, and Southeast Asia. Our attained recogni-tion and praise from clients are attributed to our thorough production management, unique and creative styles of product design, superior craftsmanship, and high-quality after-sales service. Adhering to professionalism, MM Provider is dedicated to deliver superior quality and service for clients to co-create a better future.



PROJECT SHOWCASE




















osite: Email:

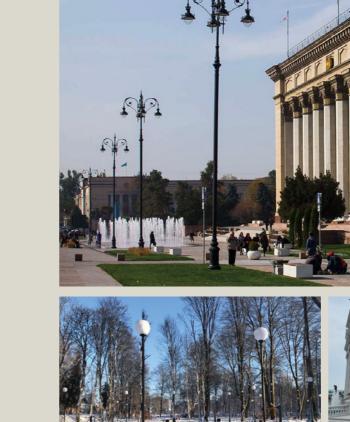















PROJECT SHOWCASE

















narkstrade.com

Email

INDEX










INDEX







Phone/ WatsApp: 25 WeChat: C Website: Email: +86 150 6791 1410 EXCHAPTION WWW.mmarkstrade.com

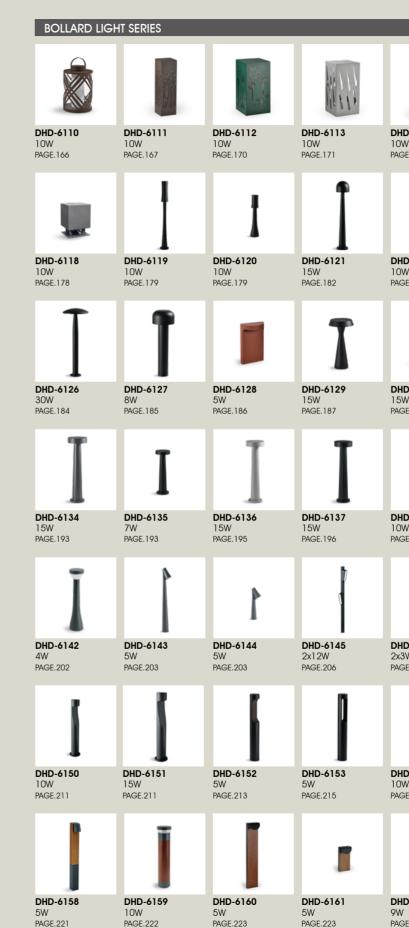



DHD-6114 10W PAGE.172



DHD-6122 10W PAGE.182



DHD-6130 15W PAGE.188



DHD-6138 10W PAGE.197



DHD-6146 2x3W PAGE.208



DHD-6154 10W PAGE.218



DHD-6162 PAGE.226



DHD-6115 10W PAGE.173



DHD-6123 7W PAGE.182



DHD-6131 15W PAGE.189



DHD-6139 15W PAGE.197



DHD-6147 2x5W PAGE.208



DHD-6155 10W PAGE.218



9W PAGE.226



DHD-6116 10W PAGE.174



DHD-6124 10W PAGE.184



DHD-6132 15W PAGE.192



DHD-6140 7W PAGE.199



5W PAGE.209



DHD-6156 5W PAGE.219



DHD-6164 9W PAGE.228





DHD-6117 20W PAGE.176



DHD-6125 20W PAGE.184



DHD-6133 7W PAGE.192



DHD-6141 4W PAGE.202



DHD-6149 10W PAGE.211




DHD-6157 5W PAGE.219



DHD-6165 5W PAGE.229

INDEX

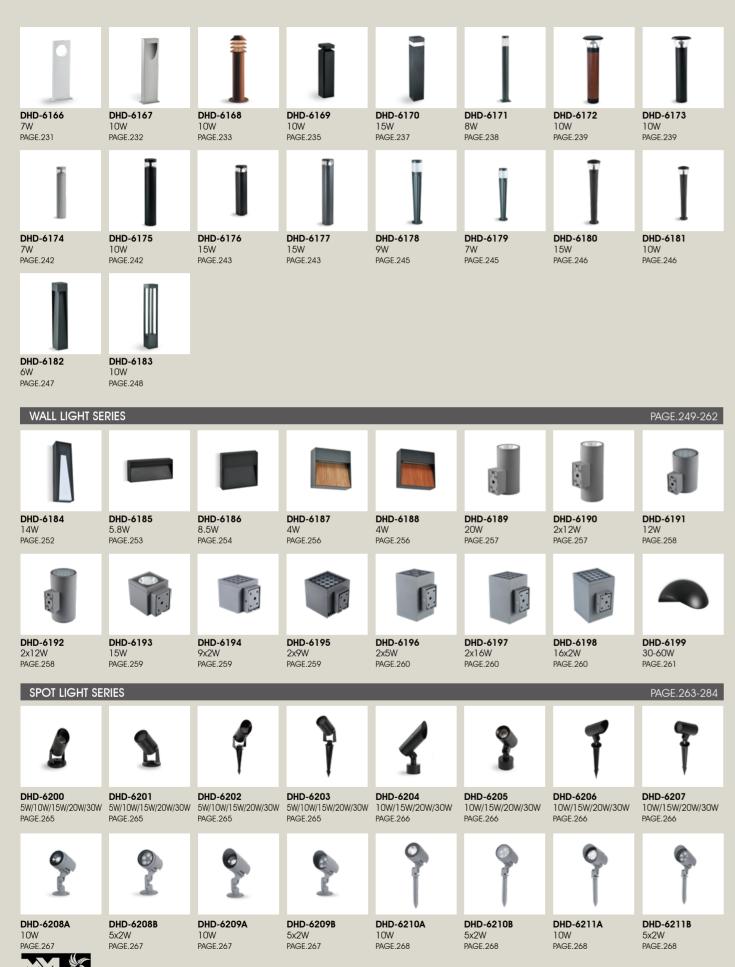

. 1 DHD-6212 DHD-6213 DHD-6214 DHD-6215 2.8W/7W/10W/15W/25W 10W/20W/30W/50W 10W/20W/30W/50W 10W/20W/30W/50W 10W/20W/30W/50W 10W/20W/30W/50W 10W 2.8W PAGE.269 PAGE.270 PAGE.271 PAGE.274 DHD-6220 DHD-6221 DHD-6222 DHD-6223 10W/20W/30W/50W 10W/20W/30W/50W 18W/32W/60W 18W/32W/60W PAGE.276 PAGE.274 PAGE.274 PAGE.276







DHD-6228 DHD-6229 36x5W 24x4W PAGE.278 PAGE.279

DHD-6230 54x2W PAGE,280

DHD-6231 5x1W PAGE 281







DHD-6236 4x5W PAGE.283

5x5W

DHD-6238 PAGE.284

DHD-6241

1W/3W

PAGE.288

UNDERGROUND LIGHT SERIES

DHD-6237

5x5W

PAGE.284



DHD-6245

DHD-6250A

11-16W

PAGE 297

1.5-7.5W

PAGE.291





PAGE.287 PAGE.287



DHD-6246A

PAGE.292



7W

PAGE.292



DHD-6242

1W/3W

PAGE,288

DHD-6246B

DHD-6247A 5.8W PAGE.293



9W







11-16W PAGE 297

DHD-6250B

DHD-6251A 18-31W PAGE 298

DHD-6251B 18-31W PAGE 298

Bat: Website: Email: www.mmarkstrade.com info@mmarkstrade.com



DHD-6216 PAGE.274



DHD-6224 18W/32W/60W PAGE.276



DHD-6232 5x1W PAGE.281



DHD-6217 PAGE.274



DHD-6225 18W/32W/60W PAGE.276



DHD-6233 18x1W PAGE 282



DHD-6218 PAGE.274



DHD-6226 18W/32W/60W PAGE.276



DHD-6234 18x1W PAGE 282



DHD-6219 PAGE.274



DHD-6227 36x5W PAGE.278



DHD-6235 4x5W PAGE.283

PAGE.285-300



DHD-6244C 2.3-2.8W PAGE.290



DHD-6249B 6-10W PAGE.296



DHD-6253B 11-20W PAGE 300



DHD-6243 3W PAGE.289



DHD-6247B 8.5W PAGE.293



DHD-6252A 8-11W PAGE 299



DHD-6244A 2.3-2.8W PAGE.290



DHD-6248 23W PAGE.294



DHD-6252B 8-11W PAGE 299

0

DHD-6244B 2.3-2.8W PAGE.290



DHD-6249A 6-10W PAGE.296



DHD-6253A 11-20W PAGE 300







Available On Request



DHD-6001

4130mm height, for outdoor installation. 360° light emission. Matt green anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Suitable for E27 bulb 40-60W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 40-60W.

Technical Data		
Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	PMMA	
Finishing	Matt green	
Reflector	Professional optical reflector	
Thermostable Silica Gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	50W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain
Matt Green		








Available On Request



DHD-6002

4470mm height, for outdoor installation. 360° light emission. Bronze anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 20-40W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 20-40W.

Technical Data Material Aluminum Coating Anti-corrosion and UV-proof powder coating Opal PC Diffuser Bronze Finishing Professional optical reflector Reflector Made of thermostable silica gel to improve Thermostable protection class silica gel Screws Stainless steel LED Lamp 3x30W Wattage Power Supply AC100-277V 50/60Hz Type On/Off







Technical Features



Available On Request



DHD-6003

Technical Data

5000mm height, for outdoor installation. 360° light emission. Matt black and golden anti-corrosion and UV-proof powder coating. Stainless steel screws. LED module light source, with 150*70° beam angle. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 40-60W.

Material	Aluminum+iron
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC
Finishing	Matt black+golden
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	2x50W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature CRI Beam Angle 3000K / 4000K / 5000K / 5700K ≥70 Symmetrical Finish Color: Gray Matt Grey Gray Metal Matt Black Dark Grey Matt Grey Golden Gray Metal







Available On Request



DHD-6004

4548mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 30-50W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 30-60W.

Technical Data Material Aluminum Coating Anti-corrosion and UV-proof powder coating Diffuser Opal PC Finishing Matt Black Reflector Professional optical reflector Made of thermostable silica gel to improve Thermostable protection class silica gel Screws Stainless steel LED Lamp 50W Wattage Power Supply AC100-277V 50/60Hz Type On/Off

Color Temperature		CRI	Beam Angle
3000K / 4000K / 5000K / 5700K		≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain



Technical Features



Available On Request



DHD-6005

5047mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 20-40W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 20-40W.

Material Aluminum Coating Anti-corrosion and UV-proof powder coating Opal PC Diffuser Finishing Matt Black Professional optical reflector Reflector Thermostable Made of thermostable silica gel to improve protection class silica gel Stainless steel Screws LED Lamp 3x30W Wattage Power Supply AC100-277V 50/60Hz On/Off Type

Color Temperature		CRI	Beam Angle
3000K / 4000K / 5000K / 5700K		≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain







Available on request



DHD-6006

4500mm height, for outdoor installation. 360° light emission. Matt coffee and golden anti-corrosion and UV-proof powder coating. Stainless steel screws. LED module light source, with 150*70° beam angle. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 30-60W.

Technical Data

Aluminum+iron
Anti-corrosion and UV-proof powder coating
Clear PC
Matt coffee+golden
Professional optical reflector
Made of thermostable silica gel to improve protection class
Stainless steel
LED
2x40W
AC100-277V 50/60Hz
On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain
Golden Matt Coffee		



Technical features



Available on request



DHD-6007

5000mm height, for outdoor installation. 360° light emission. Matt black and golden anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 30-50W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 30-60W.

Material	Aluminum+iron
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Matt black+golden
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	2x50W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain
Golden		








DHD-6008 / DHD-6009

For outdoor installation. 360° light emission. Bronze and golden anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 20-35W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 10-30W.

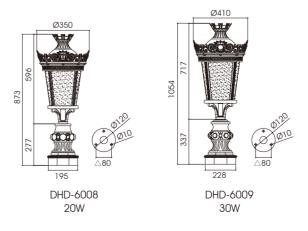

Technical Features

Available on Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PC
Finishing	Bronze+golden
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	20W/30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off


Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color: Matt Black Dark Grey Golden	Matt Grey	Gray Metal Sand Grain







721mm height, for outdoor installation. 360° light emission. Matt black and golden anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 20-35W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 20-30W.



Technical Features



Available on Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Matt black+golden
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color: Matt Black Dark Grey Golden	Matt Grey	Gray Metal Sand Grain







857mm height, for outdoor installation. 360° light emission. Matt black and golden anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 20-35W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 10-30W.



Technical Features

Available on Request



-			-	
Tec	hn		1)0	to
1EC		icui	Du	IU

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PC
Finishing	Matt black+golden
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	20W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain
Golden		







Available on request




DHD-6012

4380mm height, for outdoor installation. 360° light emission. Bronze anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 30-50W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 30-60W.

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Bronze
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	50W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain

The second s	1 March	
- And		
1		
-	/	

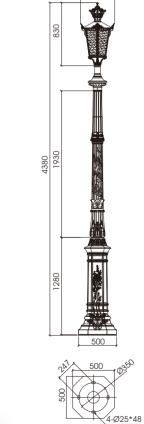

Ø450











Available On Request



DHD-6013


5112mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 30-50W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 30-60W.

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable Silica Gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	3x50W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperat	ure	CRI	Beam Angle
3000K / 4000K /	5000K / 5700K	≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain





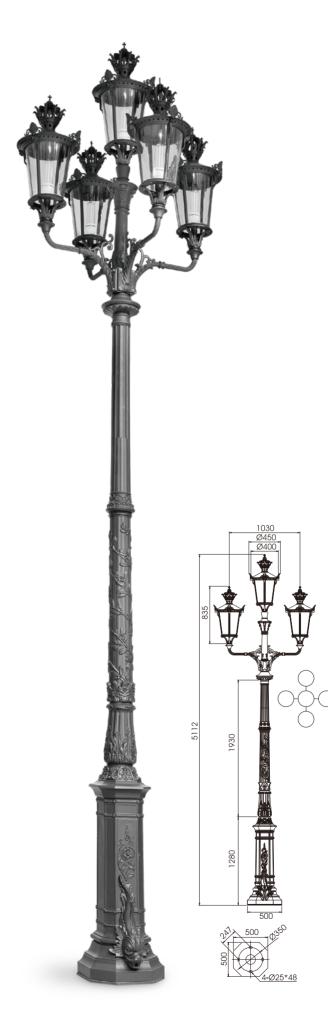



Available On Request



DHD-6014

5112mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 30-50W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 30-60W.

Material Aluminum Anti-corrosion and UV-proof powder coating Coating Diffuser Clear PC Matt black Finishing Reflector Professional optical reflector Made of thermostable silica gel to improve protection class Thermostable Silica Gel Screws Stainless steel Lamp LED Wattage 5x50W Power Supply AC100-277V 50/60Hz On/Off Туре

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain





1384mm height, for outdoor installation. 360° light emission. Bronze anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 30-50W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 30-50W.



Color Temperate	lre	CRI	Beam Angle
3000K / 4000K /	5000K / 5700K	≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain

PROVIDER


Technical Features



Available On Request



Technical Da	ta
Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Bronze
Reflector	Professional optical reflector
Thermostable Silica Gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

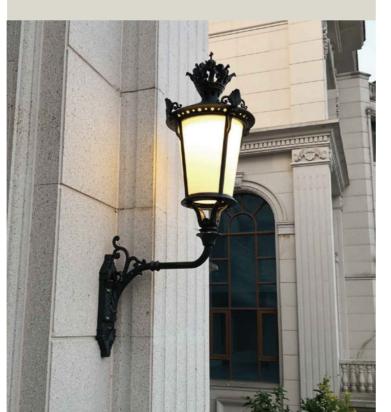



Color Temperature		CRI	Beam Angle
3000K / 4000K / 5000K / 5700K		≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Meta Sand Grain



DHD-6016


1229mm height, for outdoor installation. 360° light emission. Bronze anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 30-50W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 30-50W.


Technical Features

Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Bronze
Reflector	Professional optical reflector
Thermostable Silica Gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

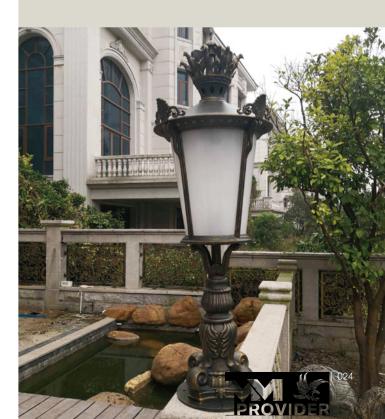

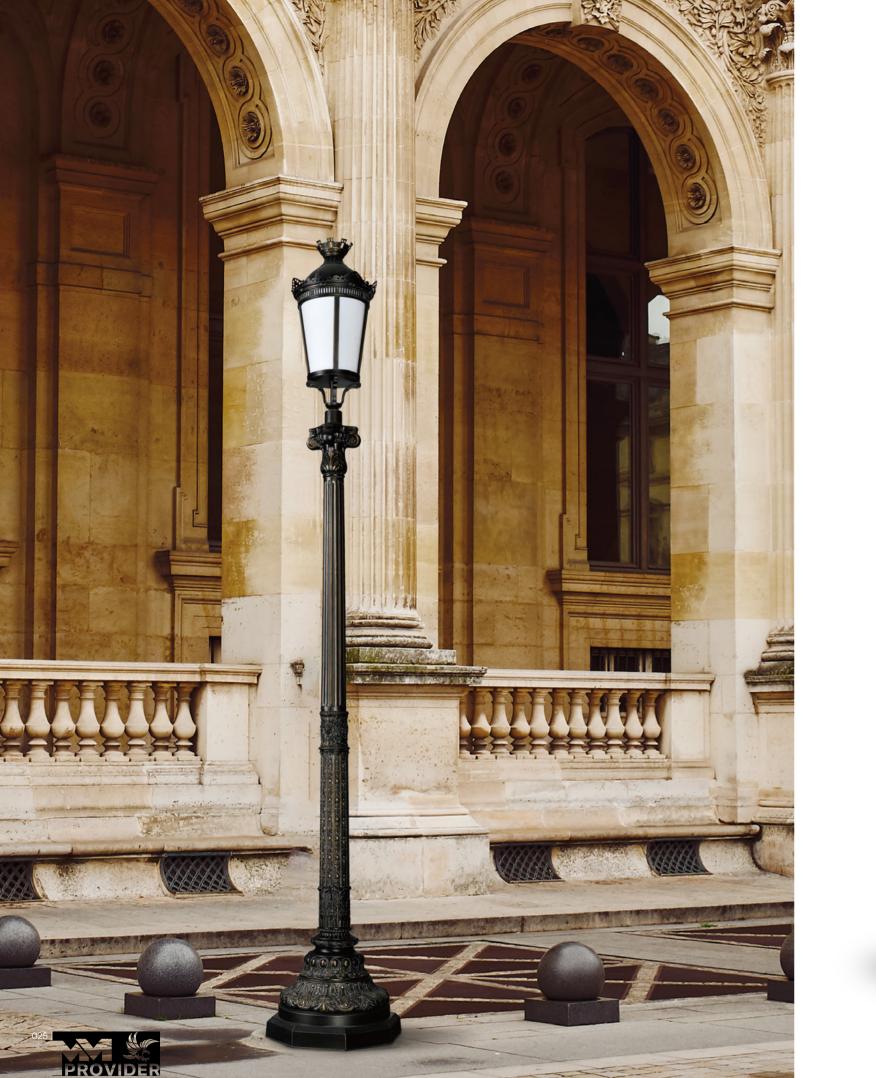





Ø454



Technical Features



Available On Request



DHD-6017


4007mm height, for outdoor installation. 360° light emission. Bronze anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 30-50W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 30-60W.

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PC
Finishing	Bronze
Reflector	Professional optical reflector
Thermostable Silica Gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	50W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature		CRI	Beam Angle
3000K / 4000K /	3000K / 4000K / 5000K / 5700K		Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain





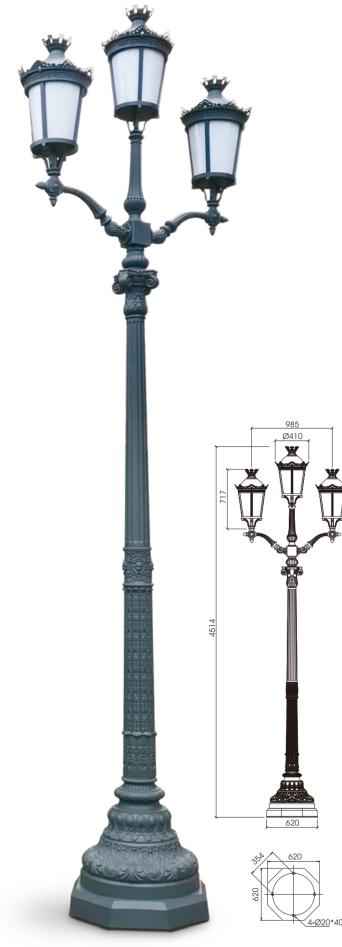



Available On Request



DHD-6018

4514mm height, for outdoor installation. 360° light emission. Dark grey anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 30-50W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 30-50W.


Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PC
Finishing	Dark grey
Reflector	Professional optical reflector
Thermostable Silica Gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	3x40W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain





1237mm height, for outdoor installation. 360° light emission. Bronze anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 20-35W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 20-30W.



Color Temperature		CRI	Beam Angle
3000K / 4000K /	5000K / 5700K	≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain

Technical Features





Available On Request



-

Technical Da	ta
Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PC
Finishing	Bronze
Reflector	Professional optical reflector
Thermostable Silica Gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

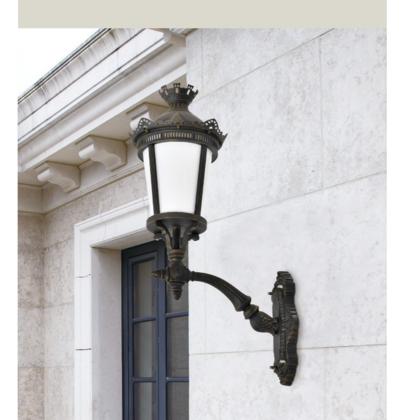



Color Temperature		CRI	Beam Angle
3000K / 4000K / 5000K / 5700K		≥70	Symmetrical
Finish Color:			



DHD-6020

935mm height, for outdoor installation. 360° light emission. Bronze anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 20-35W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 10-30W.




Technical Features

Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Bronze
Reflector	Professional optical reflector
Thermostable Silica Gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	20W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

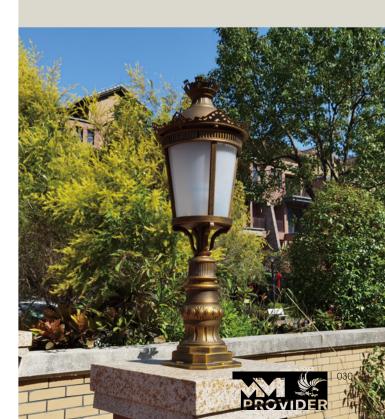









Available On Request



DHD-6021

3831mm height, for outdoor installation. 360° light emission. Matt black and green and golden anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Suitable for E27 bulb 30-60W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 30-60W.

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	PMMA
Finishing	Matt black+green+golden
Reflector	Professional optical reflector
Thermostable Silica Gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	3x50W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off


Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K /	5700K ≥70	Symmetrical
Finish Color:		
Matt Black	Grey Matt G	Gray Metal Sand Grain
Matt Green Gol	den	







1259mm height, for outdoor installation. 360° light emission. Bronze anti-corrosion and UV-proof powder coating.PMMA diffuser, and stainless steel screws. Suitable for E27 bulb 30-60W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 30-60W.



Technical Features



Available On Request



Technical Data		
Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	PMMA	
Finishing	Bronze	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	40W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	


Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain







1315mm height, for outdoor installation. 360° light emission. Matt black and golden anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Suitable for E27 bulb 30-60W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 30-60W.





Technical Features

Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	PMMA
Finishing	Matt black+golden
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	40W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain
Golden		







Available On Request



DHD-6024

3407mm height, for outdoor installation. 360° light emission. Dark grey anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 20-40W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 20-40W.

Technical Da	ta
Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PC
Finishing	Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain



Technical Features



Available On Request



DHD-6025

3511mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Tempered glass diffuser, and stainless steel screws. Suitable for E27 bulb 20-30W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 20-30W.

la
Aluminum
Anti-corrosion And Uv-proof Powder Coating
Frosted Tempered Glass
Matt Black
Professional Optical Reflector
Made Of Thermostable Silica Gel To Improve Protection Class
Stainless Steel
LED
2x20W
AC100-277v 50/60hz
On/Off

Color Temperature		CRI	Beam Angle
3000K / 4000K / 5000K / 5700K		≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain

PROVIDER





Available On Request



o-10V DALI


DHD-6026

3742mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 20-30W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 20-30W.

Technical Data

leennear ba	
Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	3x20W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		



Color Temperature		CRI	Beam Angle
3000K / 4000K / 5000K / 5700K		≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain



DHD-6027

1006mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 20-30W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 20-30W.



Technical Features

Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	20W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off







Available On Request



DHD-6028

2867mm height, for outdoor installation. 360° light emission. Matt green and bronze anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Suitable for E27 bulb 20W-35W.

Technical Data

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PMMA
Finishing	Matt green + bronze
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Wattage	LED bulb 2x23W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥80	Symmetrical
Finish Color:		
		Cray Moto

Matt Black Dark Grey Matt Grey Gray Metal Sand Grain Matt Green





Technical Features



Available On Request



DHD-6029

3021mm height, for outdoor installation. 360° light emission. Matt green and golden anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 30-50W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 30-60W.

Material	Aluminum		
Coating	Anti-corrosion and UV-proof powder coating		
Diffuser	Opal PC		
Finishing	Matt green+golden		
Reflector	Professional optical reflector		
Thermostable silica gel	Made of thermostable silica gel to improve protection class		
Screws	Stainless steel		
Lamp	LED		
Wattage	50W		
Power Supply	AC100-277V 50/60Hz		
Туре	On/Off		

Color Temperature		CRI	Beam Angle
3000K / 4000K / 4	5000K / 5700K	≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain
Matt Green	Golden		







Available On Request



DHD-6030

2330mm height, for outdoor installation. 360° light emission. Bronze anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 20-30W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 20-30W.

Technical Data Material Aluminum Anti-corrosion and UV-proof powder coating Coating Diffuser Opal PC Bronze Finishing Reflector Professional optical reflector Made of thermostable silica gel to improve protection class Thermostable silica gel Stainless steel Screws LED Lamp Wattage 20W Power Supply AC100-277V 50/60Hz On/Off Type

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain





Technical Features



Available On Request



DHD-6031

2049mm height, for outdoor installation. 360° light emission. Matt black and bronze anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 20-30W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 20-30W.

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PC
Finishing	Matt black+bronze
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	20W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature		CRI	Beam Angle
3000K / 4000K / 5000K / 5700K		≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain







Available On Request



DHD-6032

3077mm height, for outdoor installation. 360° light emission. Matt coffee and golden anti-corrosion and UV-proof powder coating. Tempered glass diffuser, and stainless steel screws. Suitable for E27 bulb 20-30W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 20-30W.

Technical Data

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted tempered glass
Finishing	Matt coffee+golden
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	20W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature		CRI	Beam Angle
3000K / 4000K / 4	5000K / 5700I	K ≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	/ Matt Grey	Gray Metal Sand Grain
Matt Coffee	Golden		



Technical Features




Available On Request



DHD-6033

3348mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 15W-25W.

Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Opal PC	
Finishing	Matt black	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Wattage	2x15W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	

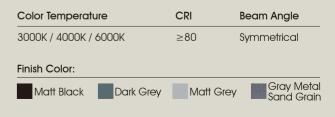







Available On Request



DHD-6034

2694mm height, for outdoor installation. 360° light emission. White and bronze anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 20-30W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 20-30W.

Technical Data

Material	Aluminum		
Coating	Anti-corrosion and UV-proof powder coating		
Diffuser	Opal PC		
Finishing	White+bronze		
Reflector	Professional optical reflector		
Thermostable silica gel	Made of thermostable silica gel to improve protection class		
Screws	Stainless steel		
Lamp	LED		
Wattage	20W		
Power Supply	AC100-277V 50/60Hz		
Туре	On/Off		
Color Tempera	ture CRI Beam Angle		


3000K / 4000K / 5000K / 5700	K ≥70	Symmetrical
Finish Color:		
Matt Black Dark Gre	y Matt Grey	Gray Metal Sand Grain
Matt White		







PROVIDE

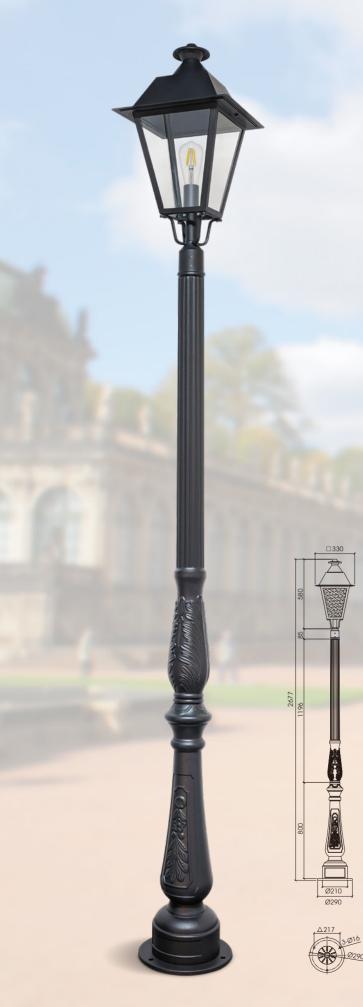



Available On Request




DHD-6035

2677mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Tempered glass diffuser, and stainless steel screws. Suitable for E27 bulb 20-30W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 20-30W.

Technical Data

Material	Aluminum		
Coating	Anti-corrosion and UV-proof powder coating		
Diffuser	Clear tempered glass		
Finishing	Matt black		
Reflector	Professional optical reflector		
Thermostable silica gel	Made of thermostable silica gel to improve protection class		
Screws	Stainless steel		
Wattage	15W		
Power Supply	100-277V 50/60Hz		
Туре	On/Off		

Color Temperature		CRI	Beam Angle
3000K / 4000K / 5000K / 5700K		≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain



Color Temperature		CRI	Beam Angle
3000K / 4000K / 5000K / 5700K		≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain



DHD-6036

1055mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating.Tempered glass diffuser, and stainless steel screws. Suitable for E27 bulb 30-50W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 30-60W.




Technical Features



Available On Request



Material A	Numinum
Coating A	nti-corrosion and UV-proof powder coating
Diffuser (Clear tempered glass
Finishing N	Natt black
Reflector P	rofessional optical reflector
	Nade of thermostable silica gel to improve protection class
Screws S	tainless steel
Wattage L	ED bulb 23W
Power Supply	00-277V 50/60Hz
Туре (Dn/Off

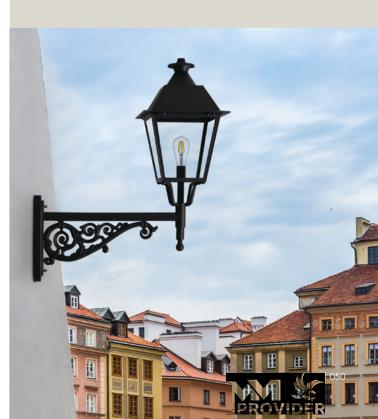





Available On Request



DHD-6037

3000mm height, for outdoor installation. 360° light emission. Matt black and golden anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 20-35W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 20-30W.

Technical Data


Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PC
Finishing	Matt black+golden
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp holder	LED
Suitable Wattage	30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off


Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain
Golden		



DHD-6038

530mm height bollard, for outdoor installation, 360° light emission. Matt black and golden anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 7-15W.



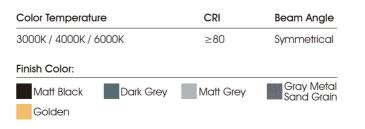



Technical Features

Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC
Finishing	Matt black+golden
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	9W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off










Ø113

665mm height bollard, for outdoor installation, 360° light emission. Matt red anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 7-10W.

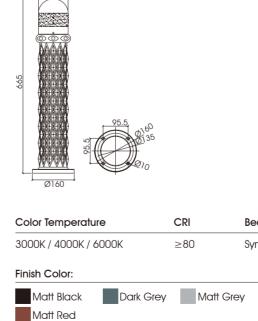

Beam Angle

Symmetrical

Gray Metal Sand Grain

Technical Features

Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Matt red
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	7W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off





745mm height bollard, for outdoor installation, 360° light emission. Matt green and golden anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 7-15W.

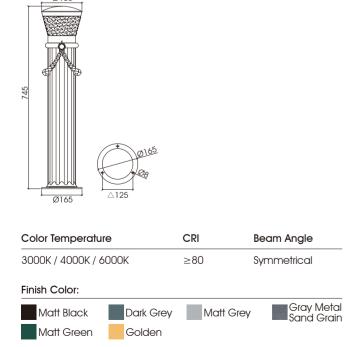

PROVIDER

Technical Features



Available On Request



Material	Aluminum		
Coating	Anti-corrosion and UV-proof powder coating		
Diffuser	Frosted PC		
Finishing	Matt green+golden		
Reflector	Professional optical reflector		
Thermostable silica gel	Made of thermostable silica gel to improve protection class		
Screws	Stainless steel		
Lamp	LED		
Wattage	9W		
Power Supply	AC100-277V 50/60Hz		
Туре	On/Off		










5500mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 20-40W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 20-40W.

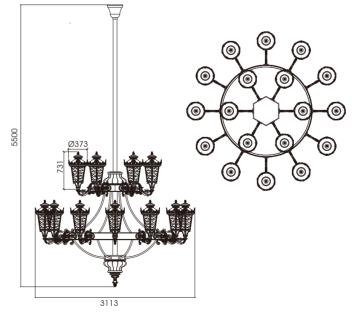

Technical Features

Available On Request



Material	Aluminum+iron
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	18x30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature		CRI	Beam Angle
3000K / 4000K / 5000K / 5700K		≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain






3000mm height, for outdoor installation. 360° light emission. Bronze anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 30-60W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 30-60W.

Technical Features



Available On Request



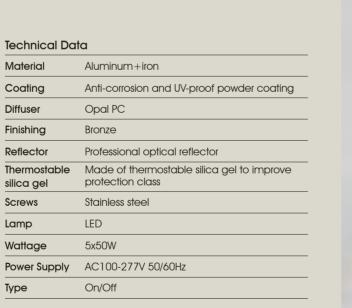

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain



DHD-6043

1510mm height, for outdoor installation. 360° light emission. Matt coffee anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Suitable for E27 bulb 20-40W, and LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz, power range 20-40W.



Technical Features

Available On Request



Material	Aluminum+iron
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PC
Finishing	Matt coffee
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	3x30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		


Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain
Matt Coffee			







3500mm height, for outdoor installation. 360° light emission. Champagne anti-corrosion and UV-proof powder coating. PMMA diffuser, Built-in LED driver 100-277V 50/60Hz, power range 18W.

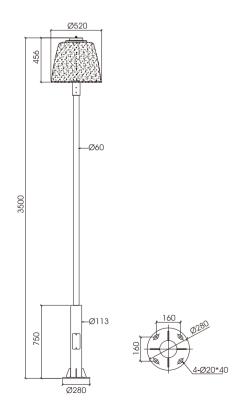

PROVIDER

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	PMMA
Finishing	Champagne
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	18W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Ang l e
3000K / 4000K / 6000K	≥80	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain
Champagne		










3500mm height, for outdoor installation. 360° light emission. Matt green anti-corrosion and UV-proof powder coating. Stainless steel screws. LED module light source, with 150*70° beam angle. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 40-120W.

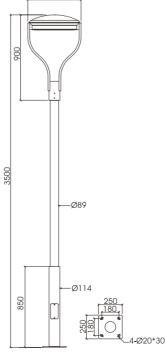

Technical Features

Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC
Finishing	Matt green
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	2x30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperatu	re	CRI	Beam Angle
3000K / 4000K / 5	5000K / 5700K	≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain





3500mm height, for outdoor installation. 360° light emission. Dark grey anti-corrosion and UV-proof powder coating. Tempered glass diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 30-75W.

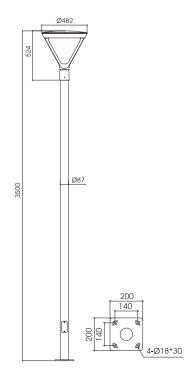

PROVIDER

Technical Features



Available On Request



Technical Data

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	60W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥70	Symmetrical
Finish Color:		
Matt Black Dark G	Grey Mat	t Grey Gray Metal Sand Grain






MODERN SERIES





3500mm height, for outdoor installation. 360° light emission. Dark grey anti-corrosion and UV-proof powder coating. Tempered glass diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 30-75W.

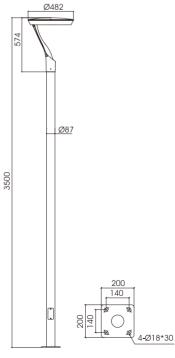

Technical Features

Available On Request



Technical Data		
Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Clear tempered glass	
Finishing	Dark grey	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	60W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	


Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Gre	y Gray Metal Sand Grain






DHD-6048 / DHD-6049

For outdoor installation. 360° light emission. Dark grey anti-corrosion and UV-proof powder coating. Stainless steel screws. LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 30-50W.

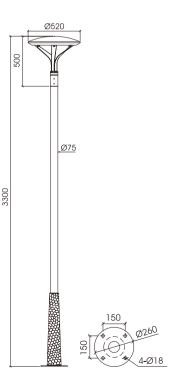

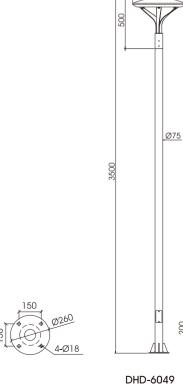

140

 \bigcirc

<u>4-Ø18*3</u>5

Technical Features



Available On Request



Technical Data

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC
Finishing	Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	40W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain






DHD-6048







3217mm height, for outdoor installation. 360° light emission. Dark grey anti-corrosion and UV-proof powder coating. Tempered glass diffuser, and stainless steel screws. LED module light source, built-in LED driver AC100-277V 50/60Hz, power range 40-75W.

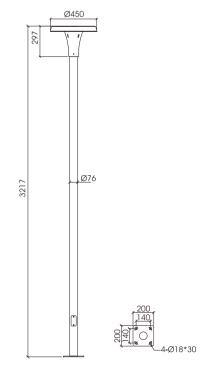

073 PROVIDER

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Tempered glass
Finishing	Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	40W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature		CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain










3500mm height, for outdoor installation. 360° light emission. Dark grey anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 30-75W.

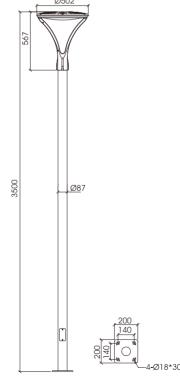

Technical Features

Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PC
Finishing	Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	60W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Ang l e
3000K / 4000K / 6000K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain





3200mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 30-50W.

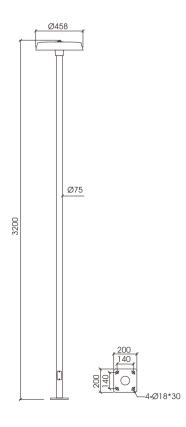

Technical Features



Available On Request



Material	Aluminum			
Coating	Anti-corrosion	Anti-corrosion and UV-proof powder coating		
Diffuser	Opal PMMA			
Finishing	Matt black			
Reflector	Professional o	ptical reflect	tor	
Thermostable silica gel	Made of thermostable silica gel to improve protection class			
Screws	Stainless steel	l		
Lamp	LED			
Wattage	30W			
Power Supply	AC100-277V	50/60Hz		
Туре	On/Off			
Color Tempera	ture	CRI	Beam Angle	
3000K / 4000K /	6000K	≥80	Symmetrical	
Finish Color:				
Matt Black	Dark Grey	Matt G	Gray Metal Sand Grain	












3500mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 30-50W.

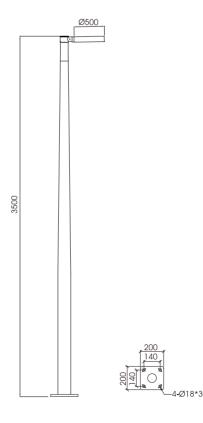

Technical Features



Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PMMA
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥80	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Gr	ey Gray Metal Sand Grain





3335mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Tempered glass diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 20-40W.

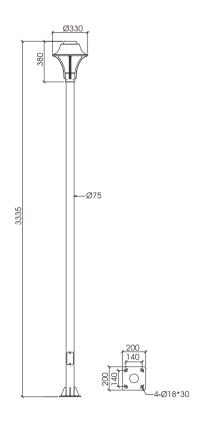

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted tempered glass
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color temperature	CRI	Beam angle
3000K / 4000K / 6000K	≥80	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain












DHD-6055 / DHD-6056

For outdoor installation. 360° light emission. Dark grey/Matt green anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 20-40W.

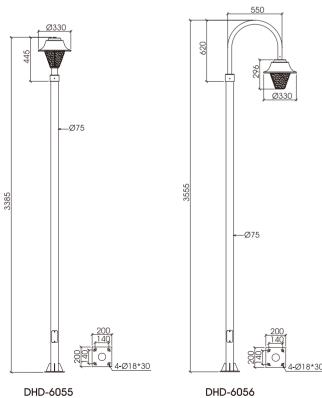



Technical Features



Available On Request



Technical Data

lechnicul Du	iu		
Material	Aluminum		
Coating	Anti-corrosion	and UV-proof p	owder coating
Diffuser	PMMA		
Finishing	Dark grey/Mat	t green	
Reflector	Professional op	otical reflector	
Thermostable silica gel	Made of them protection cla	nostable silica (Iss	gel to improve
Screws	Stainless steel		
Lamp	LED		
Wattage	30W		
Power Supply	AC100-277V 5	50/60Hz	
Туре	On/Off		
Color tempera	ture	CRI	Beam angle
3000K / 4000K	/ 6000K	≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal

Sand Grain Matt Green










3500mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 30-50W.

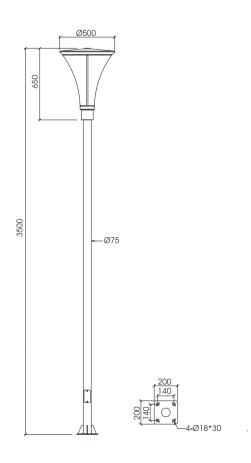

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PMMA
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥80	Symmetrical
Finish Color:		
Matt Black Dark G	Grey Mat	Gray Metal












3248mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz. Wattage Range 20-35W.

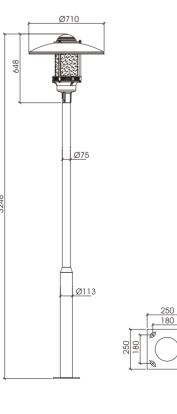

<u>4-Ø20*</u>40

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PMMA
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	35W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off


Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥80	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain







3500mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Suitable for E27 bulb 20-35W, and LED light source, built-in LED driver AC100-277V 50/60Hz, power range 20-40W.

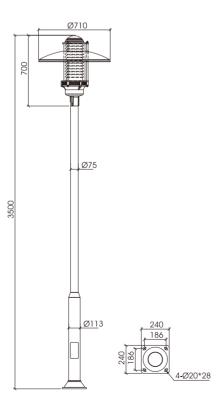

Technical Features



Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	PMMA
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperat	ure	CRI	Beam Angle
3000K / 4000K /	5000K / 5700K	≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain





3500mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Suitable for E27 bulb 20-35W, and LED light source, built-in LED driver AC100-277V 50/60Hz, power range 20-40W.

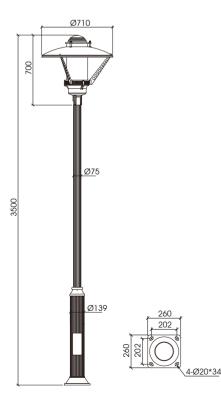

Technical Features



Available On Request



Material	Aluminum		
Coating	Anti-corrosion	and UV-proof p	owder coating
Diffuser	PMMA		
Finishing	Matt black		
Reflector	Professional op	otical reflector	
Thermostable silica gel	Made of them protection cla	nostable silica (ss	gel to improve
Screws	Stainless steel		
Lamp	LED		
Wattage	30W		
Power Supply	AC100-277V 5	i0/60Hz	
Туре	On/Off		
Color Tempera	ture	CRI	Beam Angle
3000K / 4000K	/ 6000K	≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Me












3500mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 20-30W.

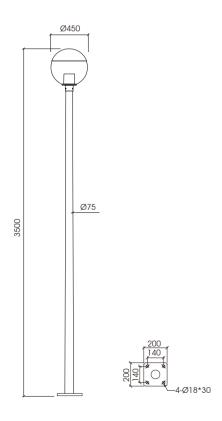

PROVIDER

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PMMA
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Type	On/Off


Color Temperature	CRI	Beam Angle	
3000K / 4000K / 6000K	≥80	Symmetrical	
Finish Color:			
Matt Black Dark Gr	ey Mat	t Grey Gray Met	al







3500mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 30-40W.

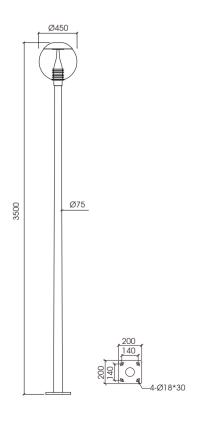





Available On Request



Technical Data

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PMMA
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Type	On/Off

Color Temperature	(CRI	Beam Angle
3000K / 4000K / 600	OK	≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Gre	Gray Metal








PROVIDER



3000mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 20-50W.

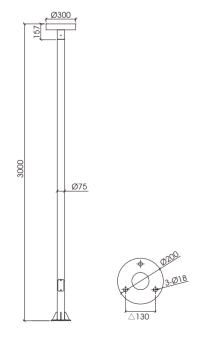

PROVIDER

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PMMA
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam	Angle
3000K / 4000K / 6000K	≥80	Symme	etrical
Finish Color:			
Matt Black Dark G	rey Ma	tt Grey	Gray Meta





Technical Features




Available On Request



DHD-6064

3580mm height, for outdoor installation. Matt black anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 20-30W.

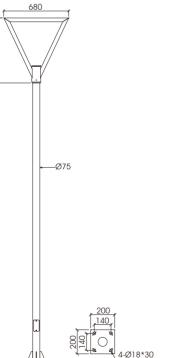

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PMMA
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	24W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off


Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥80	Symmetrical
Finish Color:		
Matt Black Dark Gre	ey Matt	Grey Gray Metal Sand Grain







3500mm height, for outdoor installation. 360° light emission. Dark grey anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 30-75W.

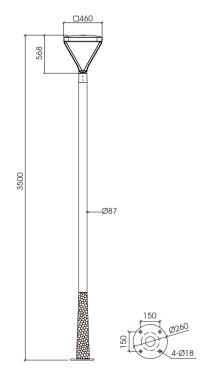



Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC
Finishing	Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	60W
Power Supply	AC100-277V 50/60Hz
Type	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥70	Symmetrical
Finish Color:		
	10 March 10	Gray Meta










3500mm height, for outdoor installation. 360° light emission. Dark grey anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 30-75W.

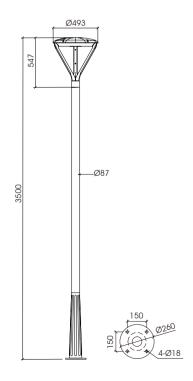



Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	50W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Gre	ey Gray Metal Sand Grain










3250mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 30-50W.

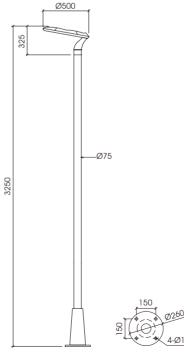

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off


Color Temperat	lure	CRI	Beam Angle
3000K / 4000K /	6000K	≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt (Gray Metal Sand Grain







3500mm height, for outdoor installation. 360° light emission. Dark grey anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 30-60W.

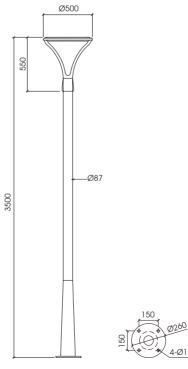

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off


Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥70	Symmetrical
Finish Color:	Matt Gre	Gray Metal Sand Grain







3500mm height, for outdoor installation. 360° light emission. Dark grey anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 30-60W.

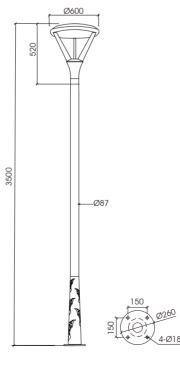

Technical Features



Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥70	Symmetrical
Finish Color: Matt Black Dark Grey	Matt Gre	Gray Metal
Matt Black Dark Grey	Matt Gre	Sand Grai





3500mm height, for outdoor installation. 360° light emission. Dark grey anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 30-60W.

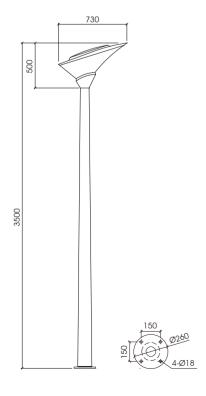



Technical Features



Available On Request



Aluminum
Anti-corrosion and UV-proof powder coating
Clear PC
Dark grey
Professional optical reflector
Made of thermostable silica gel to improve protection class
Stainless steel
LED
30W
AC100-277V 50/60Hz
On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥70	Symmetrical
Finish Color:		
		<u> </u>
















DHD-6071 / DHD-6072 / DHD-6073

For outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Stainless steel screws. LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 30-60W.

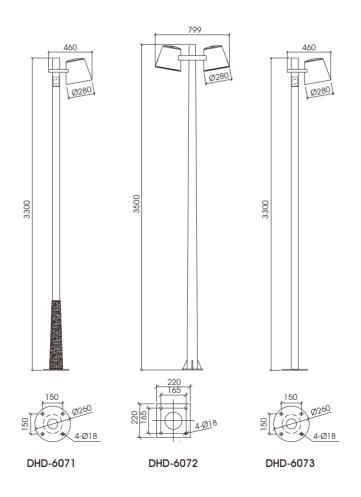

Technical Features

Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W/2x30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain





3500mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Stainless steel screws. LED module light source, with 150*70° beam angle. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 30-60W.

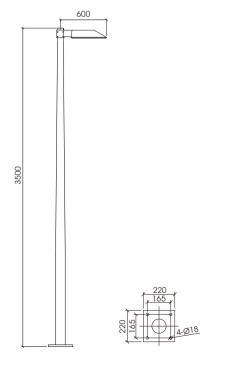

PROVIDER

Technical Features




Available On Request



Technical Data

Material	Aluminum+Stainless steel
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	50W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		

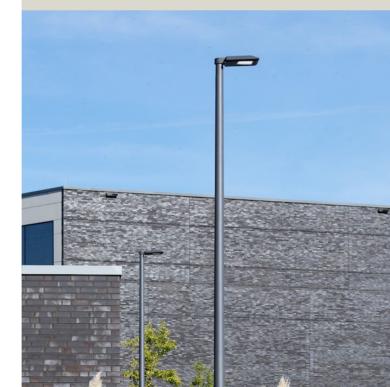








| 116



5000mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Stainless steel screws. LED module light source, with 150*70° beam angle. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 60-120W.

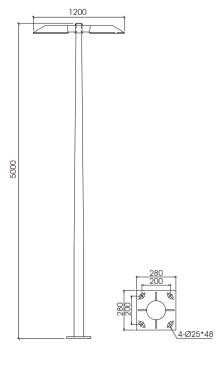

PROVIDER

Technical Features



Available On Request



Technical Data

Material	Aluminum+Stainle	ess steel	
Coating	Anti-corrosion and	d UV-proof p	owder coating
Diffuser	PC		
Finishing	Matt black		
Reflector	Professional optic	al reflector	
Thermostable silica gel	Made of thermos protection class	table silica (gel to improve
Screws	Stainless steel		
Lamp	LED		
Wattage	2x50W		
Power Supply	AC100-277V 50/6	OHz	
Туре	On/Off		
Color Tempera	ture	CRI	Beam Angle
3000K / 4000K	/ 5000k / 5700k	>70	Symmetrica

3000K / 4000K / 5	5000K / 5700K	≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Meta




118

PROVIDE



4000mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Stainless steel screws. LED module light source, with 150*70° beam angle. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 30-60W.

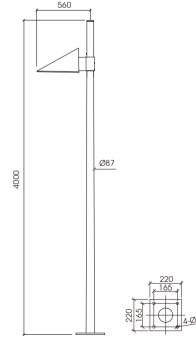

PROVIDER

Technical Features



Available On Request



Technical Data

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	50W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
	Matt Grey	Gray Metal






MM



6000mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Stainless steel screws. LED module light source, with 150*70° beam angle. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 60-120W.

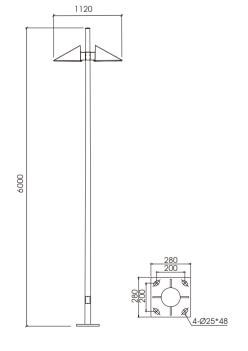

PROVIDER

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	2x50W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
	_	Gray Metal Sand Grain








DHD-6078 / DHD-6079

For outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Stainless steel screws. LED light source. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 30-60W.

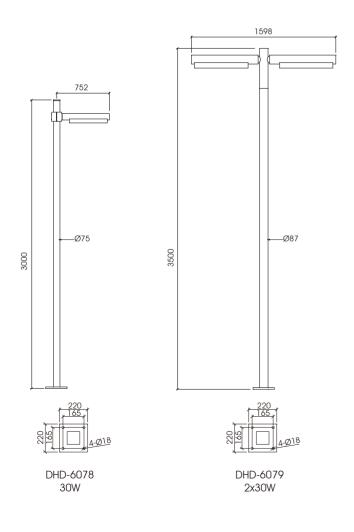

PROVIDER

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W/2x30W
Power Supply	AC100-277V 50/60Hz
Type	On/Off


Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥80	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain







3000mm height, for outdoor installation. Rotatable fixture. Matt grey anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 30W.

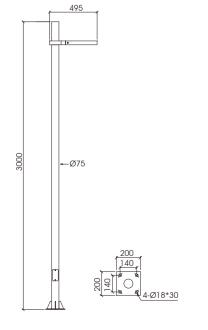

PROVIDER

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PMMA
Finishing	Matt grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥80	Asymmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain










3000mm height, for outdoor installation. Rotatable fixture. Matt grey anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 60W.

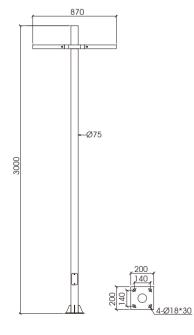

Technical Features



Available On Request



Technical Data

Aluminum	
Anti-corrosion and UV-proof powder coating	
Opal PMMA	
Matt grey	
Professional optical reflector	
Made of thermostable silica gel to improve protection class	
Stainless steel	
LED	
2x30W	
AC100-277V 50/60Hz	
On/Off	

Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥80	Asymmetrical
Finish Color:		
	_	Gray Moto











128



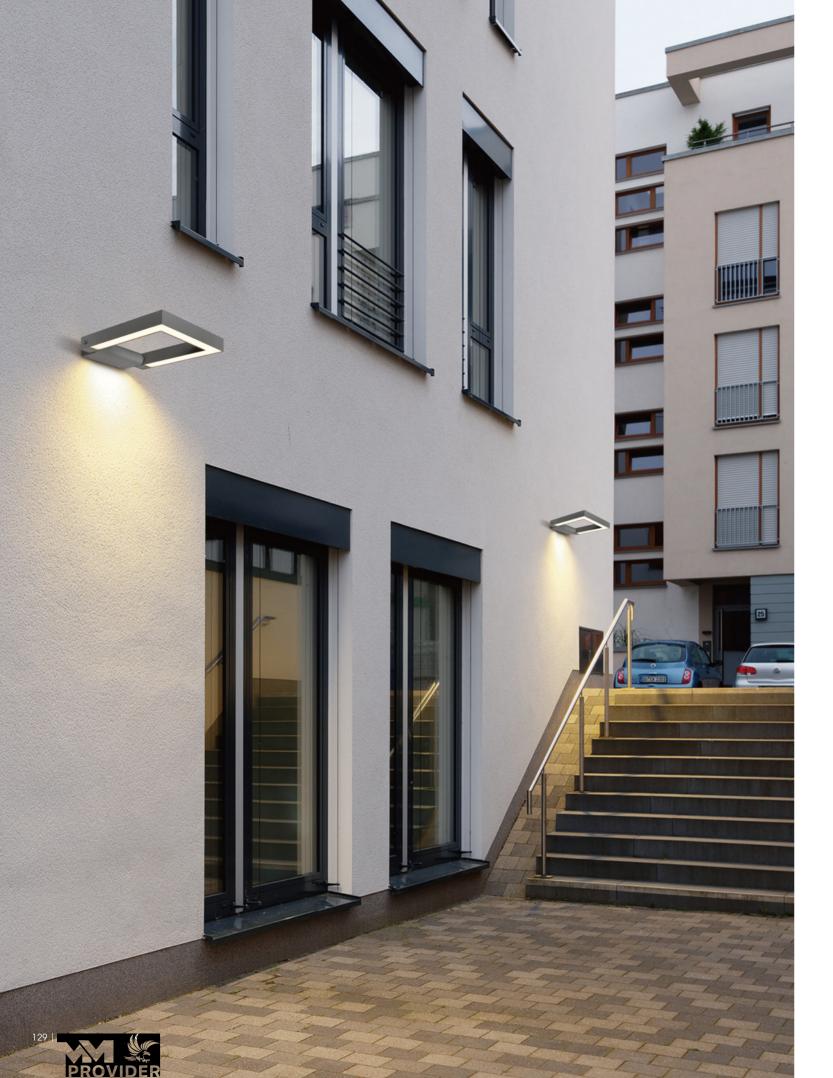



For outdoor installation. Rotatable fixture. Matt grey anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. LED light source, built-in LED driver AC100-277V 50/60Hz, power range 30W.



Technical Features



Available On Request



Technical Data

Material Aluminum Anti-corrosion and UV-proof powder coating Coating Diffuser Opal PMMA Finishing Matt grey Reflector Professional optical reflector Made of thermostable silica gel to improve Thermostable protection class silica gel Stainless steel Screws Lamp LED 30W Wattage Power Supply AC100-277V 50/60Hz On/Off Туре

Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥80	Asymmetrical
Finish Color:		
Matt Black Dark Grey	Matt (Gray Metal Sand Grain








Available On Request



DHD-6083/DHD-6084/DHD-6085

For outdoor installation. Matt black/Dark grey anti-corrosion and UV-proof powder coating. Stainless steel screws. LED module light source, with 150*70° beam angle. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 30-100W.

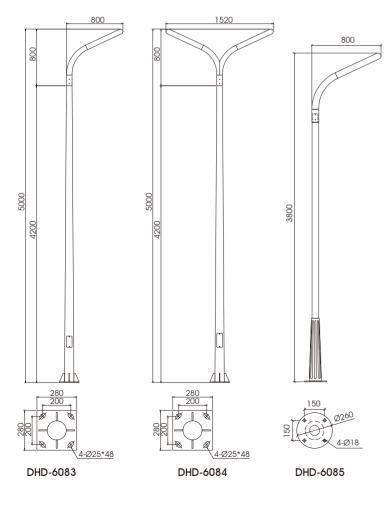

PROVIDER

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC
Finishing	Matt black/Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	50W/2x50W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color lemperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal










5000mm height, for outdoor installation. Gray Metal sand grain anti-corrosion and UV-proof powder coating. Stainless steel screws. LED module light source, with 150*70° beam angle. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 30-120W.

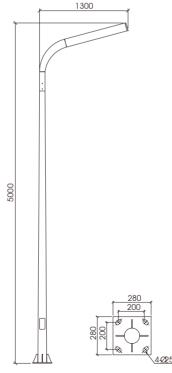

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC
Finishing	Gray Metal Sand Grain
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	2x50W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off


Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain







3650mm height, for outdoor installation. Matt black anti-corrosion and UV-proof powder coating. Stainless steel screws. LED module light source, with 150*70° beam angle. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 30-60W.

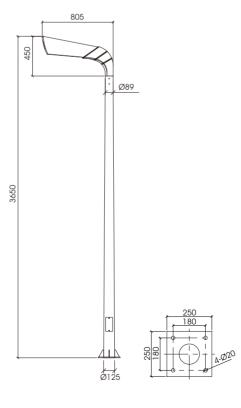

Technical Features



Available On Request



Technical Data

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	50W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off


Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain



136



4000mm height, for outdoor installation. Gray metal sand grain anti-corrosion and UV-proof powder coating. Stainless steel screws. LED module light source, with 150*70° beam angle. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 30-80W.

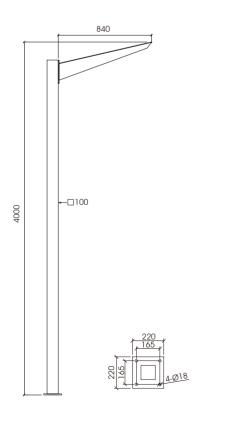

PROVIDER

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC
Finishing	Gray metal sand grain
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	60W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off


Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		







3419mm height, for outdoor installation. 360° light emission. Dark grey anti-corrosion and UV-proof powder coating. PC diffuser, and stainless steel screws. Built-in LED driver AC100-277V 50/60Hz, power range 20-30W.

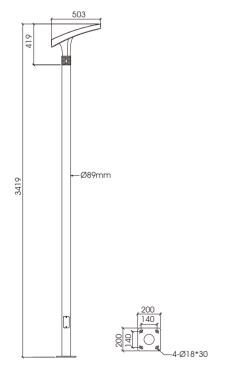

Technical Features



Available On Request



Technical Data


Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PC
Finishing	Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off





DHD-6090

3679mm height, for outdoor installation. 360° light emission. Matt grey anti-corrosion and UV-proof powder coating. PC diffuser, and stainless steel screws. Built-in LED driver AC100-277V 50/60Hz, power range 20-30W.

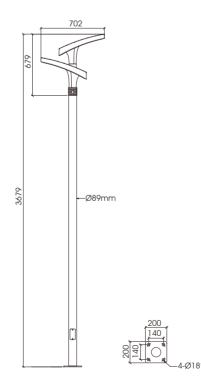



Technical Features


Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PC
Finishing	Matt grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	2x30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥80	Symmetrical
Finish Color:		
Matt Black Dark Gre	ey Matt (Grey Gray Metal Sand Grain



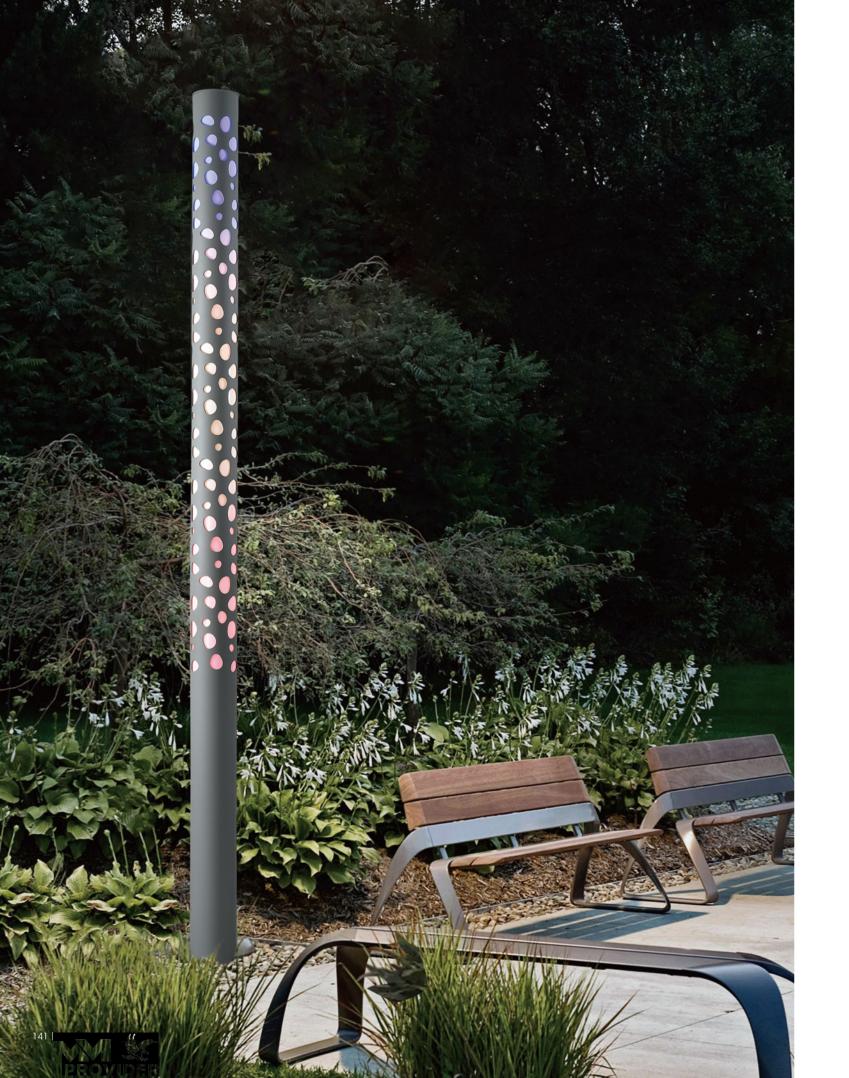



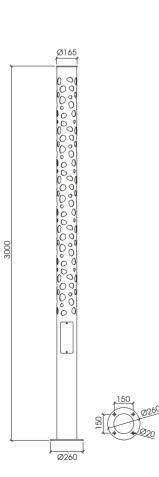



Available On Request



DHD-6091

3000mm height, for outdoor installation. 360° light emission. Matt grey anti-corrosion and UV-proof powder coating. PMMA diffuser, Built-in LED driver 100-277V 50/60Hz, power range 60-100W.

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PMMA
Finishing	Matt grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	100W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperat	ture	CRI	Beam Angle
3000K / 3500K /	5000K / 6000K / RGB	≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey Ma	att Grey	Gray Metal Sand Grain





Available On Request




DHD-6092 / DHD-6093


For outdoor installation. Rotatable fixture. Dark grey anti-corrosion and UV-proof powder coating. Tempered glass diffuser, Built-in LED driver 100-277V 50/60Hz, power range 30-45W.

Technical Da	
Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	2x15W/3x15W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥80	Asymmetrical
Finish Color:		
Matt Black Dark Gre	y Matt	Grey Gray Metal Sand Grain



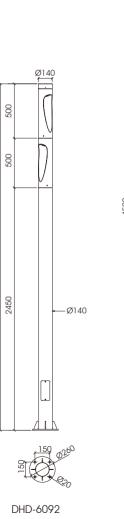

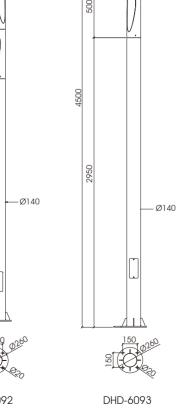


Ø140





DHD-6094 / DHD-6095 DHD-6096 / DHD-6097

For outdoor installation. Matt black / Dark grey anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 5-15W.

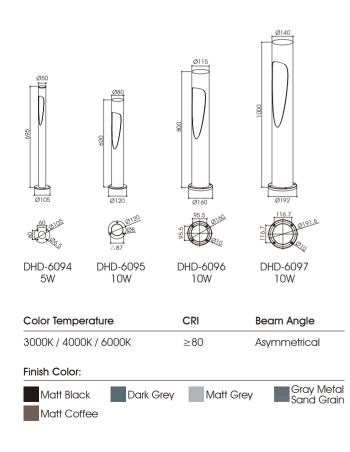

Technical Features




Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Matt black/Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	5W/10W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off



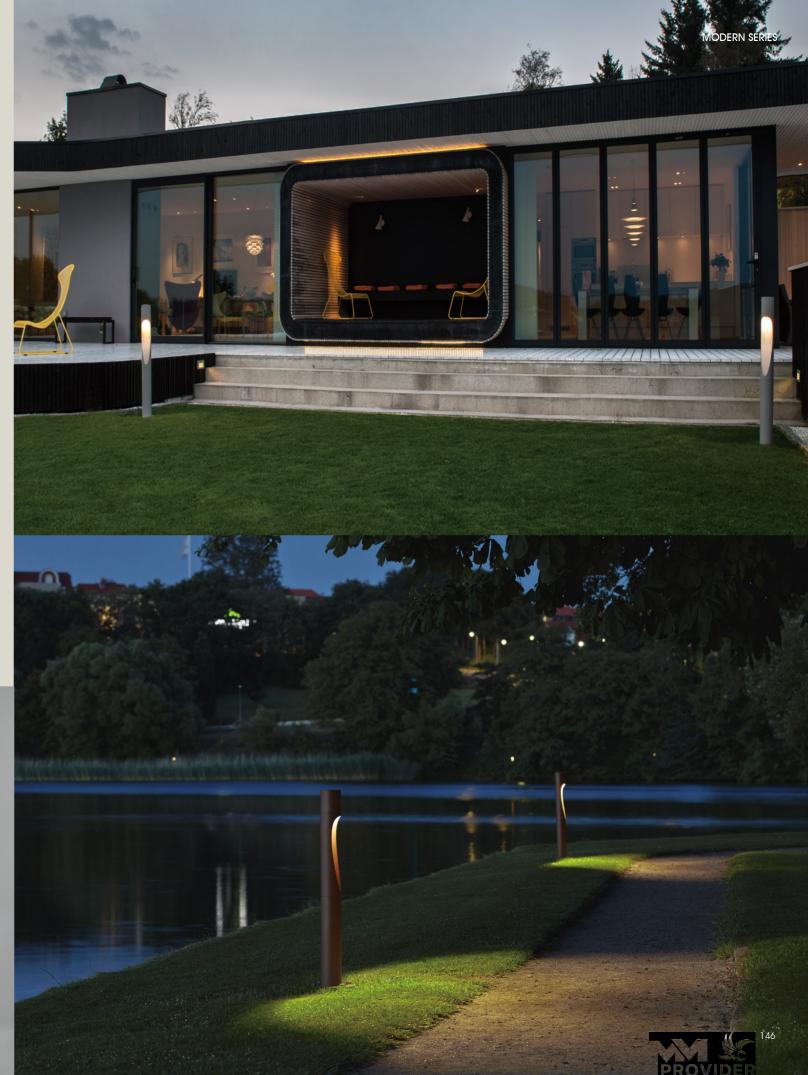



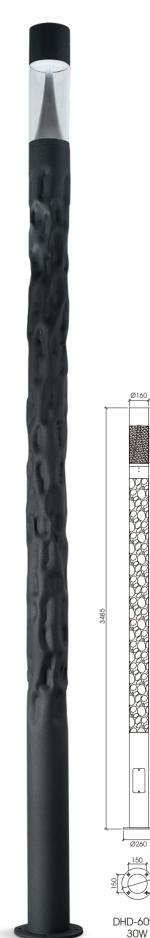

PROVIDER

DHD-6098 30W



Technical Features



Available On Request



DHD-6098 / DHD-6099

For outdoor installation. 360° light emission. Gray metal sand grain anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Built-in LED driver AC100-277V 50/60Hz, power range 10-30W.

Technical Da	ta
Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PMMA
Finishing	Gray metal sand grain
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	15W/30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Color Temperature		CRI	Beam Angle
3000K / 4000K /	6000K	≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt (Gray Met







Available On Request



DHD-6100 / DHD-6101

For outdoor installation. 360° light emission. Dark brown anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Built-in LED driver AC100-277V 50/60Hz, power range 10-20W.

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PMMA
Finishing	Dark brown
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	15W/20W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

Technical Data

Ø160

0160 2010


DHD-6101 15W

Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥80	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain












Available On Request




DHD-6102


3000mm height, for outdoor installation. 360° light emission. Matt grey anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Built-in LED driver 100-277V 50/60Hz, power range 40-60W.

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PMMA
Finishing	Matt grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	60W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

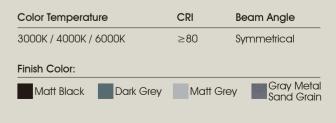



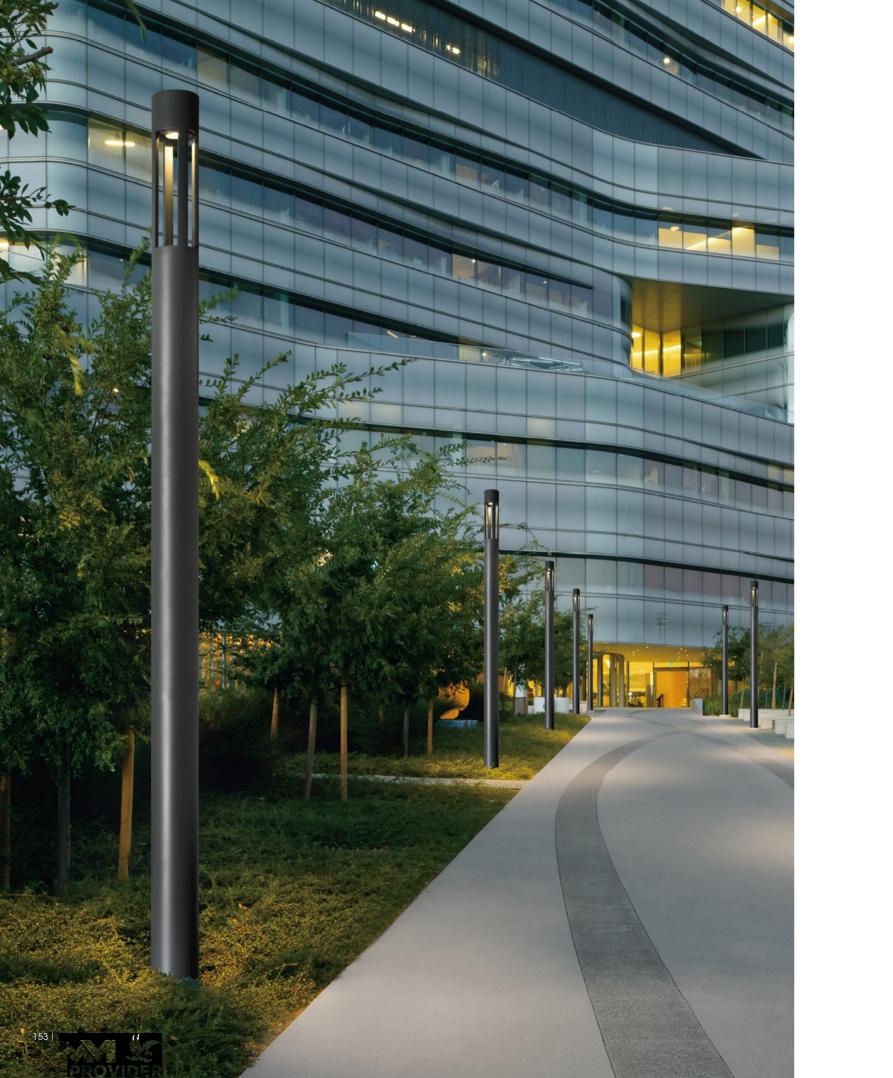

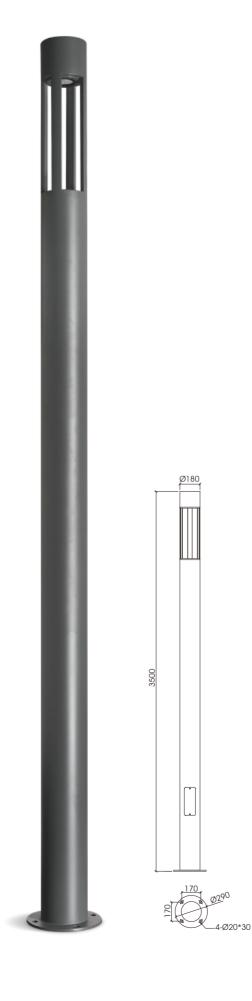



Available On Request




DHD-6103

3500mm height, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Stainless steel screws. LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 30-40W.

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	40W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off


Color Temperature	CRI	Beam Angle
3000K / 4000K / 5000K / 5700K	≥70	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain



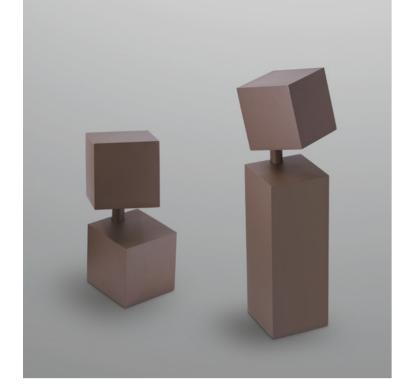

DHD-6104 / DHD-6105

For outdoor installation. Rotatable fixture. Matt coffee anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 5-15W.

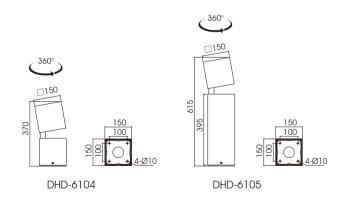

Color Temperature		CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Asymmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain

Technical Features



Available On Request




Technical Date

lechnical Data		
Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Clear tempered glass	
Finishing	Matt coffee	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	10W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	











Technical Features



Available On Request



DHD-6106

3062mm height, for outdoor installation. Rotatable fixture. Gray metal sand grain anti-corrosion and UV-proof powder coating. Stainless steel screws. LED module light source, with 120° beam angle. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 20-40W.

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC
Finishing	Gray metal sand grain
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	100-277V 50/60Hz
Туре	On/Off

Color Temperature		CRI	Beam Angle
3000K / 4000K / 5000K / 5700K		≥70	Asymmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain








Available On Request



DHD-6107

3500mm height, for outdoor surface installation. Dark grey anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Built-in LED driver 100-277V 50/60Hz. Wattage Range 20-40W.


Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

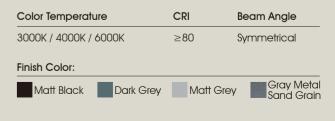







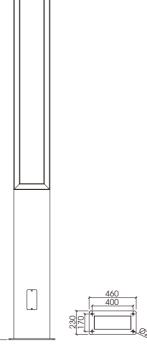

360

Technical Features



Available On Request



DHD-6108

3500mm height, for outdoor surface installation. Dark grey anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Built-in LED driver 100-277V 50/60Hz. Wattage Range 20-40W.

Technical Data		
Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Clear PC	
Finishing	Dark grey	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	30W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	

Color Temperature		CRI	Beam Angle
3000K / 4000K / 5000K / 5700K		≥70	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain







Available On Request




DHD-6109


3000mm height, for outdoor installation. 360° light emission. Matt coffee anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Built-in LED driver AC100-277V 50/60Hz, power range 20-40W.

Technical Data

Material	Stainless steel		
Coating	Anti-corrosion and UV-proof powder coating		
Diffuser	Clear tempered glass		
Finishing	Matt coffee		
Reflector	Professional optical reflector		
Thermostable silica gel	Made of thermostable silica gel to improve protection class		
Screws	Stainless steel		
Lamp	LED		
Wattage	30W		
Power Supply	AC100-277V 50/60Hz		
Туре	On/Off		
Color Temperat	ture CRI Beam Angle		

3000K / 4000K / 6000K	≥80	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal
Matt Coffee		

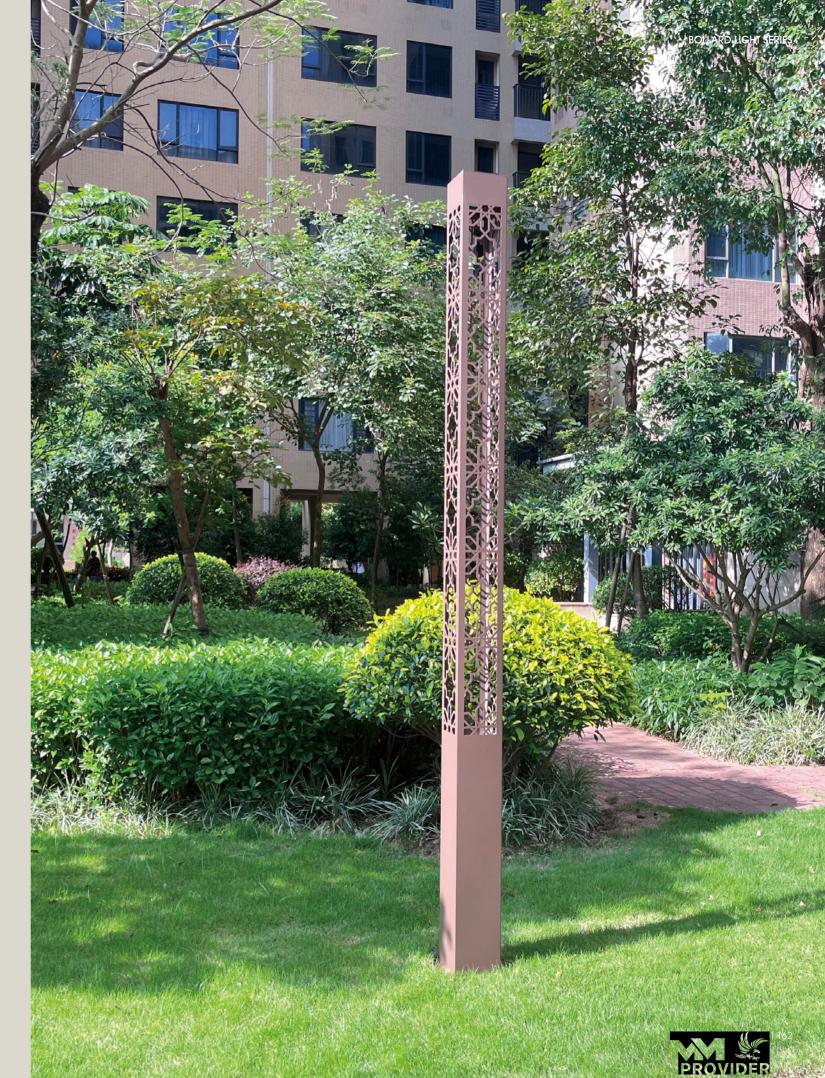

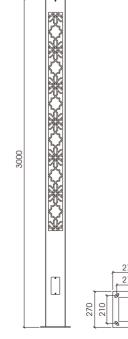

4-Ø18*35

□180






BOLLARD LIGHT SERIES




164

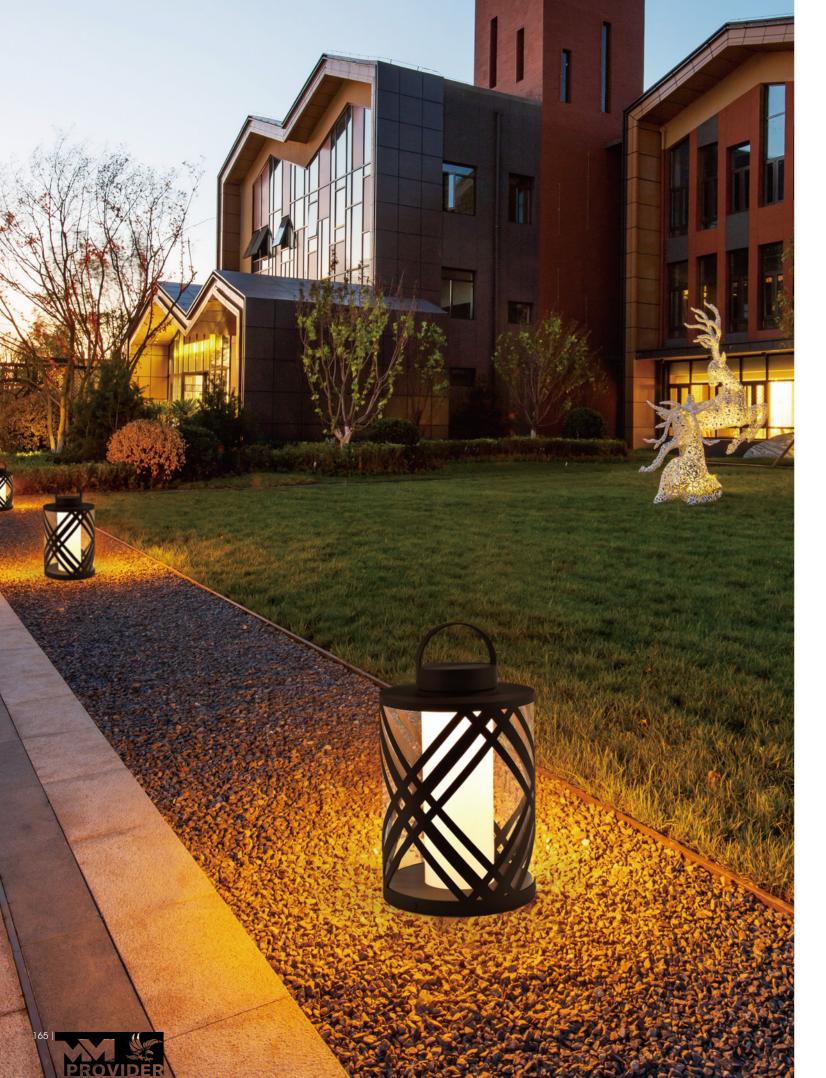



550mm height bollard, for outdoor installation. 360° light emission. Matt coffee anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Built-in LED driver AC100-277V 50/60Hz, power range 10-20W.





Color Temperature 3000K / 4000K / 6000K		CRI	Beam Angle
		≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain
Matt Coffee			

Technical Features

Available On Request



Material	Aluminum+Stainless steel
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PMMA
Finishing	Matt coffee
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	10W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off








□150

500mm height bollard, for outdoor installation. 360° light emission. Matt coffee anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Built-in LED driver AC100-277V 50/60Hz, power range 10-20W.



3000K / 4000K / 6000K		≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain
Matt Coffee			

Beam Angle

Technical Features



Available On Request



Technical Data		
Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Clear PMMA	
Finishing	Matt coffee	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	10W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	












500mm height bollard, for outdoor installation. 360° light emission. Matt green anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 10-20W.



Color Temperature		CRI	Beam Angle
3000K / 4000K /	6000K	≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	, Gray Metal Sand Grain
Matt Green			

Technical Features

Available On Request




Material	Stainless steel
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PMMA
Finishing	Matt green
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	10W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off





□300

600mm height bollard, for outdoor installation. 360° light emission. Matt green anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 10-20W.

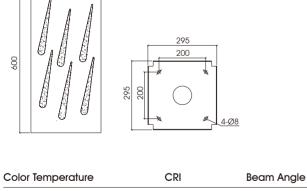

		CKI	beam Angle
3000K / 4000K / 6000K		≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain

PROVIDER

Technical Features



Available On Request




Technical Da	ta
Material	Stainless steel
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PMMA
Finishing	Matt grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	10W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off



DHD-6114

500mm height bollard, for outdoor installation. 360° light emission. Matt grey anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 10-20W.





Color Temperature		CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Ма	Gray Metal Sand Grain

Technical Features

Available On Request



Technical Data

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Matt grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	10W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off
-	






| 172



500mm height bollard, for outdoor installation. 360° light emission. Matt white anti-corrosion and UV-proof powder coating. PC diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 10-20W.



Color Temperature		CRI	Beam Angle
3000K / 4000K / 5000K / 5700K		≥70	Asymmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain
Matt White			


Technical Features




Available On Request



Technical Data Material Stainless steel Coating Anti-corrosion and UV-proof powder coating Diffuser Clear PC Finishing Matt white Professional optical reflector Reflector Made of thermostable silica gel to improve protection class Thermostable silica gel Stainless steel Screws LED Lamp Wattage 10W Power Supply AC100-277V 50/60Hz On/Off Type

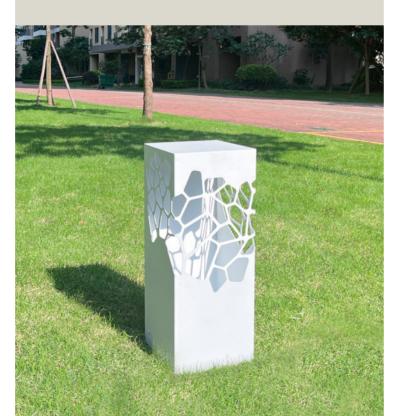



Color Temperature		CRI	Beam Angle
3000K / 4000K /	6000K	≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Ma	tt Grey Gray Metal Sand Grain



DHD-6116

800mm height bollard, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 10-20W.




Technical Features

Available On Request




Material	Stainless steel
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	10W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

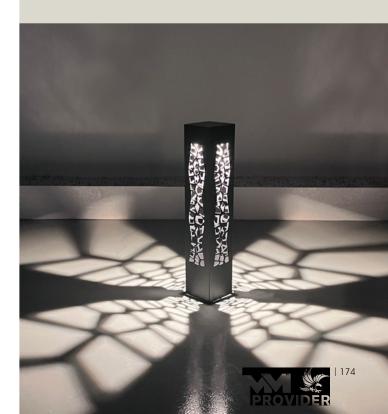





650mm height bollard, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Artificial marble diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 20-30W.





 Color Temperature
 CRI
 Beam Angle

 3000K / 4000K / 6000K
 ≥80
 Symmetrical

Finish Color:

 Matt Black
 Dark Grey
 Matt Grey

Gray Metal Sand Grain

Technical Features




Available On Request




uminum+stainless steel
ti-corrosion and UV-proof powder coating
ificial marble
att black
ofessional optical reflector
ade of thermostable silica gel to improve otection class
ainless steel
)
W
C100-277V 50/60Hz
n/Off






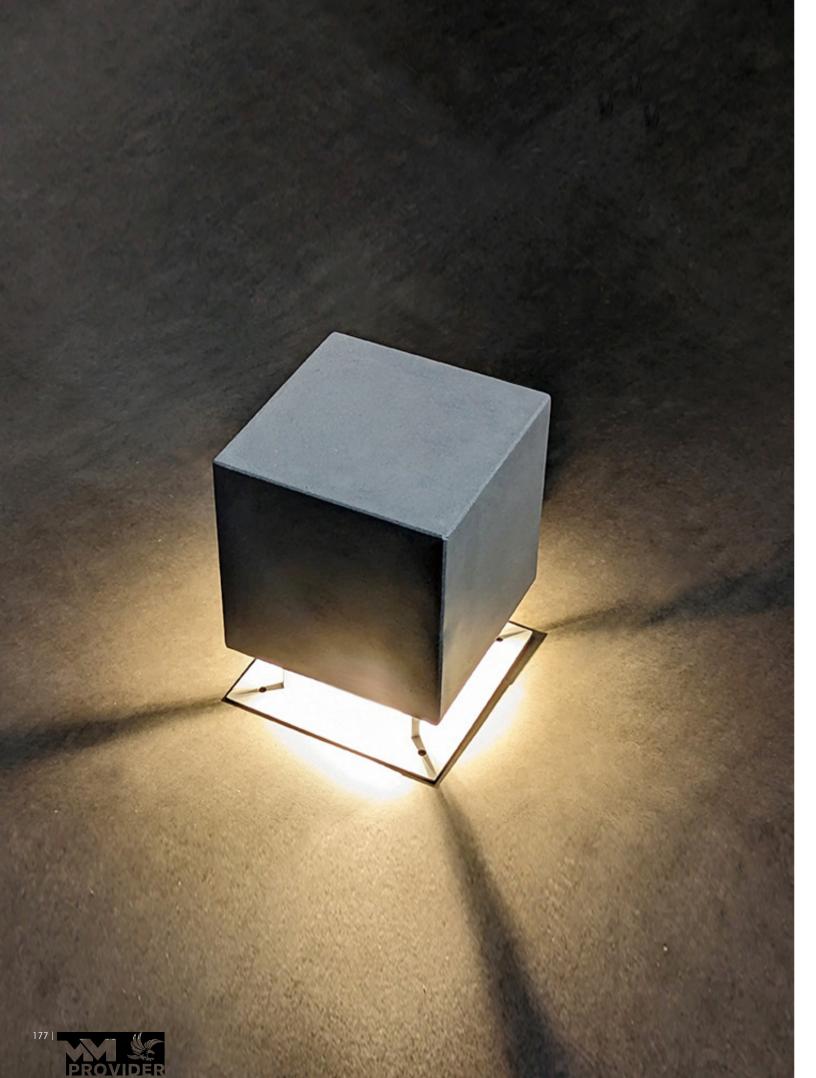

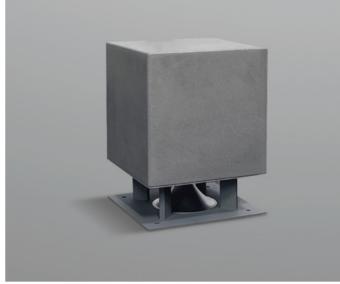

290mm height bollard, for outdoor installation. 360° light emission. Matt grey anti-corrosion and UV-proof powder coating. PC diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 10-20W.



Color Temperature 3000K / 4000K / 5000K / 5700K		CRI	Beam Angle
		≥70	Symmetrical
Finish Color:			

Technical Features

Available On Request




Material	Stainless steel+concrete
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC
Finishing	Matt grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	10W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off





DHD-6119 / DHD-6120

For outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 7-10W.

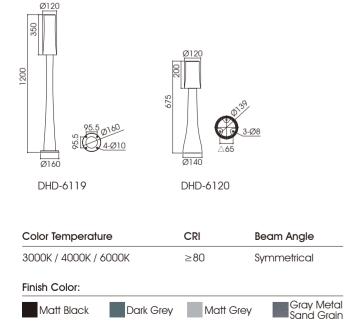

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	10W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off












DHD-6121 / DHD-6122 / DHD-6123

For outdoor installation. 360° light emission. Anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 7-20W.

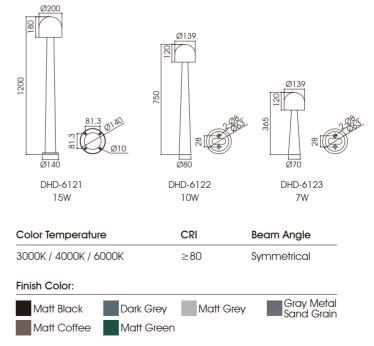

Technical Features

Available On Request





Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Matt black/Matt green/Matt coffee
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	7W/10W/15W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off










DHD-6124/DHD-6125/DHD-6126

For outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 10-30W.

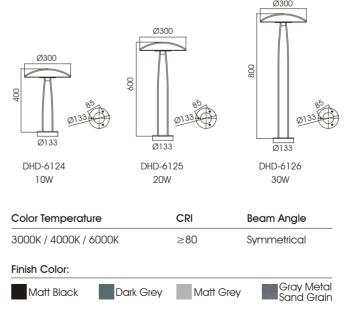

Technical Features

Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	10W/20W/30W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off





383mm height bollard, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 7W.



olor Temperatu	re	CRI	Beam Angle
000K / 4000K / 6000K		≥80	Symmetrical
inish Color:			
Matt Black	Dark Grey	Matt Gre	y Gray Metal Sand Grain

Technical Features



Available On Request




Technical Data		
Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Frosted PC	
Finishing	Matt black	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	7W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	





DHD-6128

300mm height bollard, for outdoor surface installation, 180° light emission. Matt red anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 5W.



Color Temperature		CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Asymmetrical
Finish Color:			
Matt Black Matt Red	Dark Grey	Matt Grey	Gray Metal Sand Grain



Technical Features




Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Matt red
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	5W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off



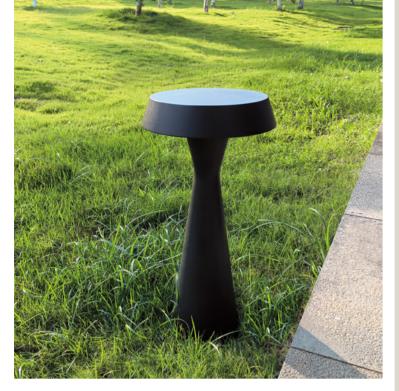

500mm height bollard, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 10-20W.

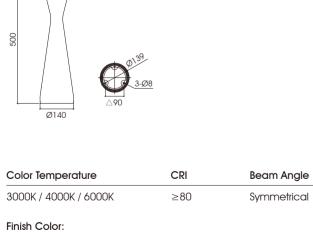

Matt Black	Dark Grey	Matt Grey

ey Gray Metal Sand Grain

Technical Features



Available On Request



.


Technical Da	ta
Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	15W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off



DHD-6130

327mm height bollard, for outdoor installation. 360° light emission. Matt green anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 10-20W.





Color Temperature		CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Symmetrical
Finish Color:			
	Dark Grey	Matt Grey	Gray Metal Sand Grain
Matt Black	,		



Technical Features

Available On Request



Technical Data

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Matt green
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	15W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off






188



640mm height bollard, for outdoor installation. 360° light emission. Matt black+Matt grey/coffee anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 10-20W.

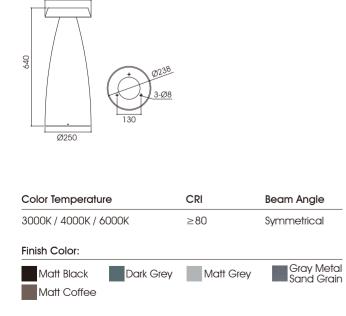

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Matt black+Matt grey/coffee
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	15W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off














DHD-6132 / DHD-6133

For outdoor installation. 360° light emission. Dark grey/Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 7-20W.

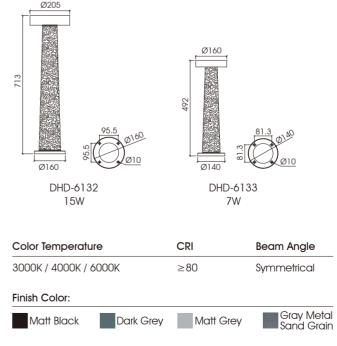

Technical Features

Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Dark grey/Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	7W/15W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off





DHD-6134 / DHD-6135

For outdoor installation. 360° light emission. Dark grey/Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 7-20W.

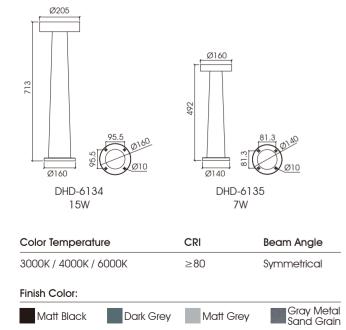

Technical Features




Available On Request




Technical Data	
Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Dark grey/Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	7W/15W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off



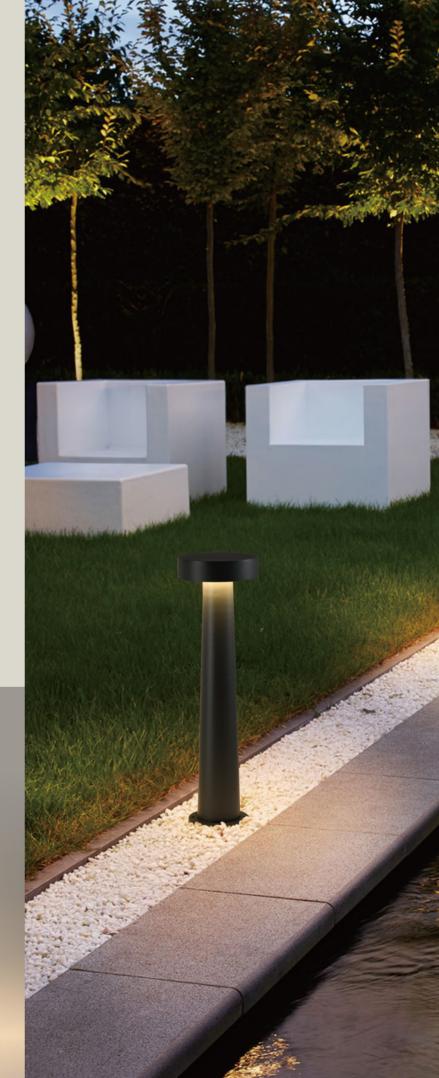








194



Ø205

713mm height bollard, for outdoor installation. 360° light emission. Matt grey anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 10-20W.

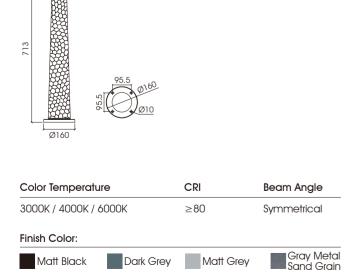

Technical Features



Available On Request




Technical Data	
Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Matt grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	15W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off





DHD-6137

713mm height bollard, for outdoor installation. 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 10-20W.



Color Temperature		CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain



Technical Features



Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	15W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off





DHD-6138 / DHD-6139

For outdoor installation. 360° light emission. Matt coffee/Matt grey anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz, power range 7-15W.

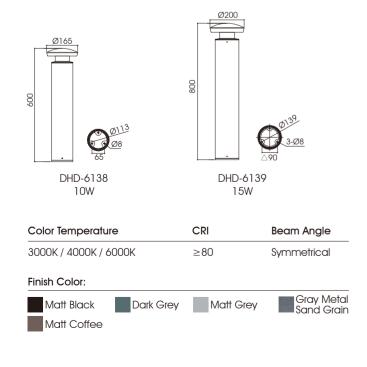

PROVIDER

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Matt coffee/Matt grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	10W/15W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off
-	










510mm height bollard, for outdoor installation, 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 7-15W.

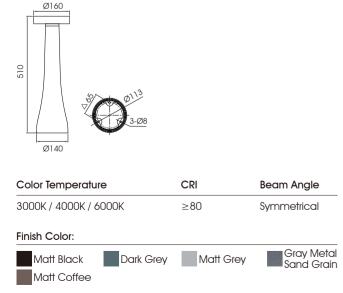

PROVIDER

Technical Features



Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	7W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off










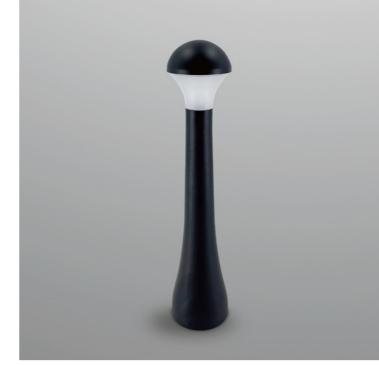

DHD-6141 / DHD-6142

For outdoor installation, 360° light emission. Matt black/Dark grey anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 4W.

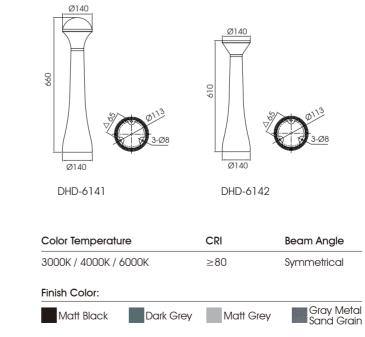

Technical Features

Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Matt black/Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	4W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off





DHD-6143 / DHD-6144

For outdoor installation. Dark grey anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 5W.

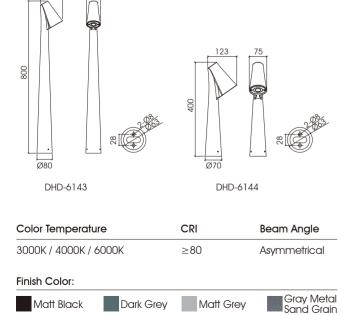

Technical Features



Available On Request



Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Clear tempered glass	
Finishing	Dark grey	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	5W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	












1500mm height bollard, for outdoor installation. Matt black anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 2*12W.

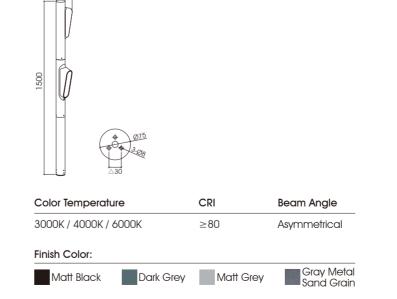

Technical Features

Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PMMA
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	2x12W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off








DHD-6146 / DHD-6147

For outdoor installation. Dark grey/Matt black anti-corrosion and UV-proof powder coating. Polycarbonate/Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 6-10W.

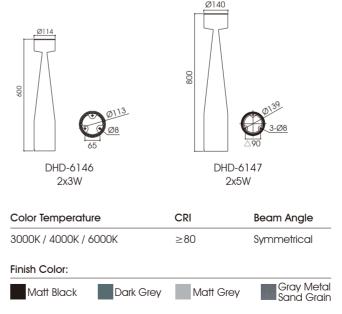

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC/Clear tempered glass
Finishing	Dark grey/Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	2x3W/2x5W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off





600mm height bollard, for outdoor installation. Dark grey anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 5W.






Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	5W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off



Color Temperature		CRI	Beam Angle	
3000K / 4000K / 6000K		≥80	Asymmetrical	
Finish Color:				
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain	










DHD-6149/DHD-6150/DHD-6151

For outdoor installation. Anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 5-15W.

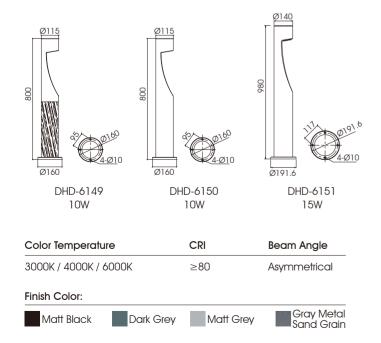

Technical Features



Available On Request



Technical Da	ta
Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Dark grey/Dark grey+wooden grain
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	10W/15W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off









-

-





700mm height bollard, for outdoor installation. Matt black and matt coffee anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 5-7W.






Available On Request



Technical Data

Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Clear tempered glass	
Finishing	Matt black+matt coffee	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	5W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	

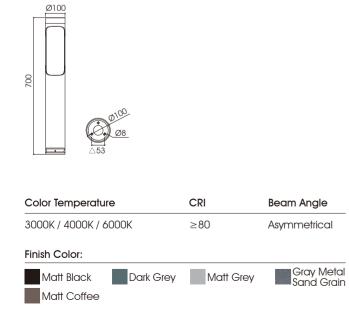










PROVIDER



700mm height bollard, for outdoor installation. Matt black anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 5-7W.



<u>^53</u>		
Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥80	Symmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain

Technical Features



Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	5W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off














DHD-6154 / DHD-6155

For outdoor installation. Dark grey+wooden grain anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 5-15W.



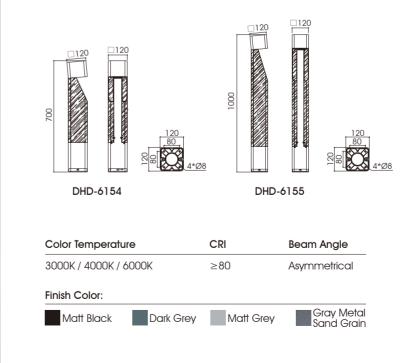

BOLLARD LIGHT SERIES



Technical Features



Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Dark grey+wooden grain
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	10W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off





DHD-6156 / DHD-6157

725mm height bollard, for outdoor installation. Matt black+wooden grain anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 5-20W.






Available On Request



Technical Data

Material	Stainless steel
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Matt black+wooden grain
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	5W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

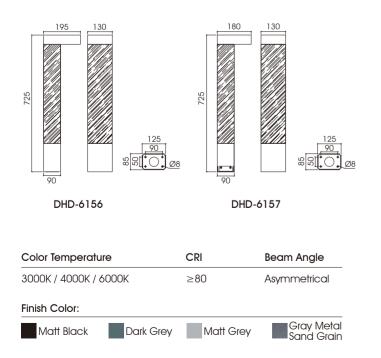


PROVIDER







1000mm height bollard, for outdoor installation. Dark grey+wooden grain anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 5-10W.



Color Temperature		CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Asymmetrical
inish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain

Technical Features




Available On Request



Technical Data Material Aluminum Coating Anti-corrosion and UV-proof powder coating Diffuser Clear tempered glass Dark grey+Wooden grain Finishing Reflector Professional optical reflector Thermostable Made of thermostable silica gel to improve protection class silica gel Stainless steel Screws Lamp LED 5W Wattage Power Supply AC100-277V 50/60Hz Type On/Off





Color Temperature		CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal



DHD-6159

800mm height bollard, for outdoor installation. Dark grey+wooden grain anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 10-15W.



C ______3

Technical Features

Available On Request




Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Clear PC	
Finishing	Dark grey+Wooden grain	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	10W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	





DHD-6160 / DHD-6161

For outdoor installation. Timber finish+Matt black anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 5W.

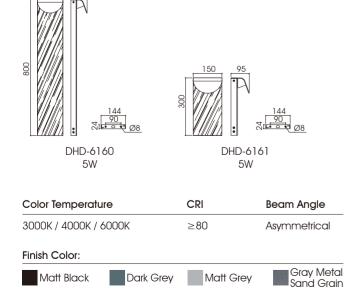

Technical Features




Available On Request



Material	Aluminum+stainless steel		
Coating	Anti-corrosion and UV-proof powder coating		
Diffuser	Frosted tempered glass		
Finishing	Matt black+Timber finish		
Reflector	Professional optical reflector		
Thermostable silica gel	Made of thermostable silica gel to improve protection class		
Screws	Stainless steel		
Lamp	LED		
Wattage	5W		
Power Supply	AC100-277V 50/60Hz		
Туре	On/Off		



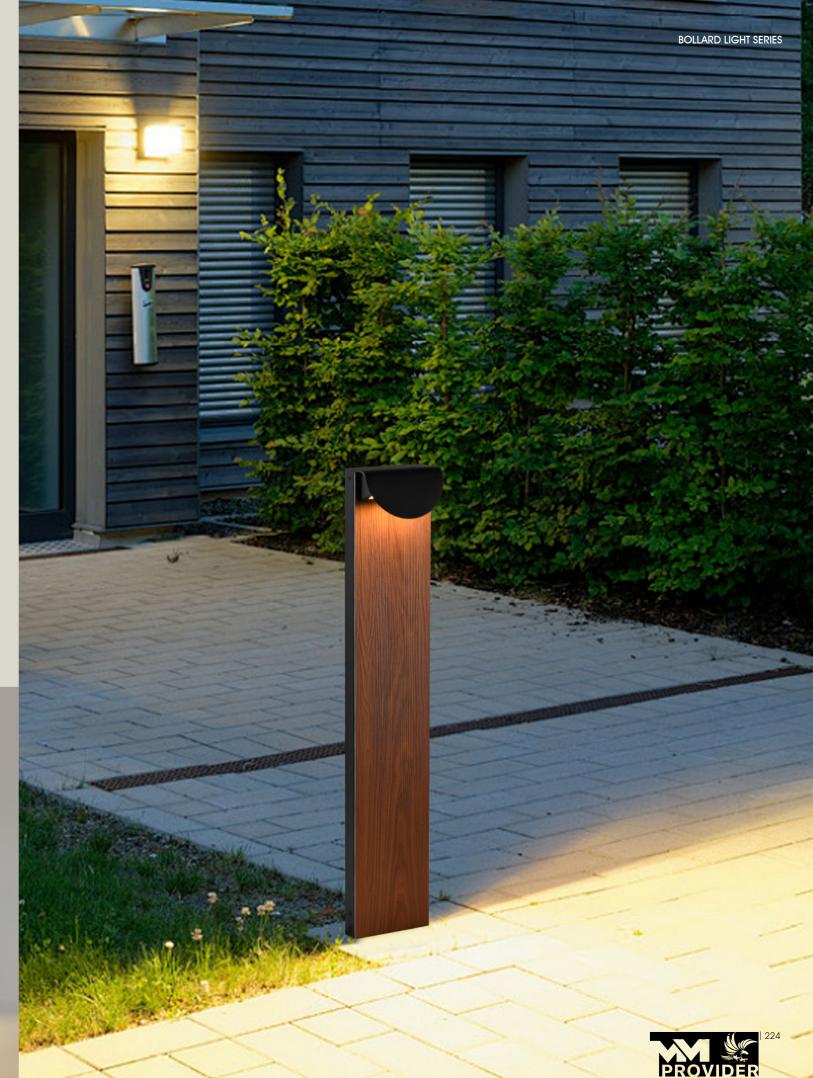








DHD-6162 / DHD-6163

1000mm height bollard, for outdoor installation. Timber finish+Dark grey/Matt black anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 9W.

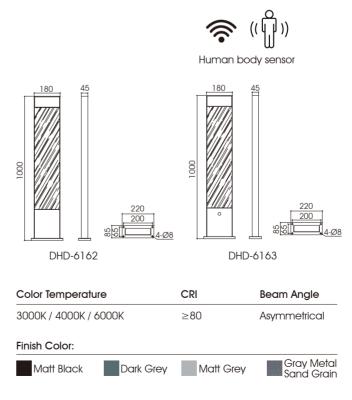

Technical Features



Available On Request




Material	Stainless steel	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Frosted tempered glass	
Finishing	Dark grey/Matt black+Timber finish	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	9W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	







800mm height bollard, for outdoor installation.Rust color anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 9W.



Color Temperature		CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Asymmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain
Rust Color			

Technical Features

Available On Request




Material	Stainless steel	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Frosted tempered glass	
Finishing	Rust color	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	9W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	


23	





600mm height bollard, for outdoor installation.Dark grey anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 5-7W.



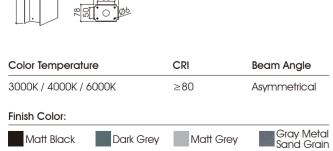

IK08

Available On Request

Technical Features



Technical Da	ta		
Material	Stainless steel		
Coating	Anti-corrosion and UV-proof powder coating		
Diffuser	Clear tempered glass		
Finishing	Dark grey		
Reflector	Professional optical reflector		
Thermostable silica gel	Made of thermostable silica gel to improve protection class		
Screws	Stainless steel		
Lamp	LED		
Wattage	5W		
Power Supply	AC100-277V 50/60Hz		
Туре	On/Off		










500mm height bollard, for outdoor installation.Matt white anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 5-7W.

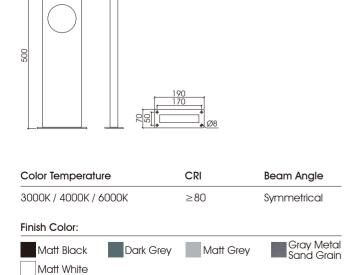




Technical Features



Available On Request




Technical Data		
Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Clear tempered glass	
Finishing	Matt white	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	7W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	

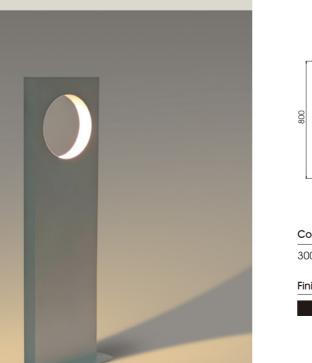



DHD-6167

800mm height bollard, for outdoor installation.Matt grey anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 5-10W.



Color Temperature		CRI	Beam Angle
000K / 4000K / 6000K		≥80	Asymmetrical
		_00	, ayr in tothodi
inish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain

Technical Features

Available On Request




Material	Aluminum		
Coating	Anti-corrosion and UV-proof powder coating		
Diffuser	Clear tempered glass		
Finishing	Matt gery		
Reflector	Professional optical reflector		
Thermostable silica gel	Made of thermostable silica gel to improve protection class		
Screws	Stainless steel		
Lamp	LED		
Wattage	10W		
Power Supply	AC100-277V 50/60Hz		
Туре	On/Off		





1000mm height bollard, for outdoor installation.Matt red anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 10-15W.



Ø220

Color Temperature		CRI ≥80	Beam Angle Symmetrical
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain

Technical Features




Available On Request



Technical Data

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	PMMA
Finishing	Matt red
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	10W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off



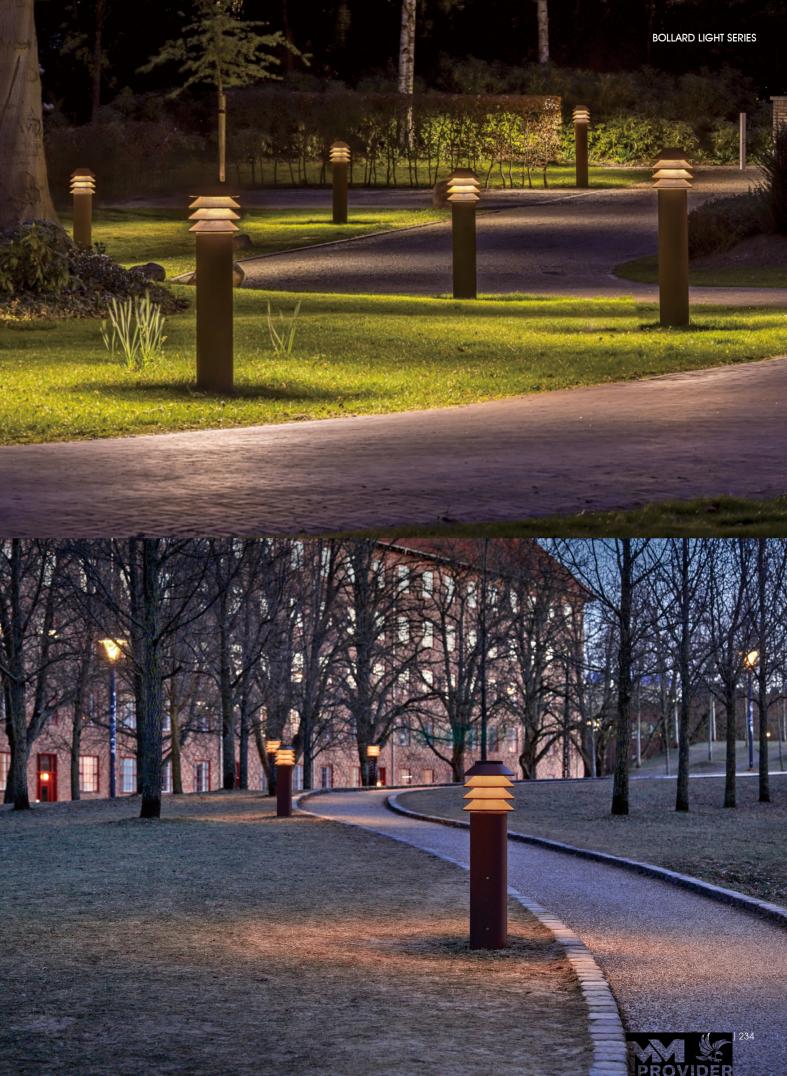




Matt Red



500mm height bollard, for outdoor installation, 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 7-10W.



Beam Angle Symmetrical

Matt Black Dark Grey Matt Grey

Technical Features



Available On Request



Technical Data


Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	10W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off








Finish Color:

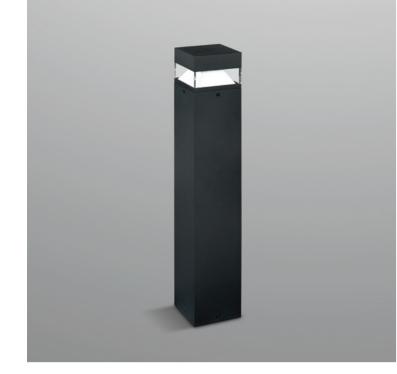

683mm height bollard, for outdoor installation, 360° light emission. Matt black anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 10-15W.



120

Color Temperature		CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain

Technical Features



Available On Request




Technical Da	ta
Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PMMA
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	15W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off





DHD-6171

1100mm height bollard, for outdoor installation, 360° light emission. Dark grey anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 2*4W.



Color Temperature 3000K / 4000K / 6000K		CRI ≥80	Beam Angle Symmetrical
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain



Technical Features

Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PMMA
Finishing	Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	8W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off






DHD-6172 / DHD-6173

800mm height bollard, for outdoor installation. Matt black+wooden grain/Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 10-15W.

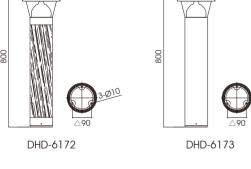



Ø232

Color Temperature		CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain

Matt Black	Dark Grey	

Available On Request

Technical Features



Technical Data


Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC
Finishing	Matt black+Wooden grain/Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	10W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off





Ø232




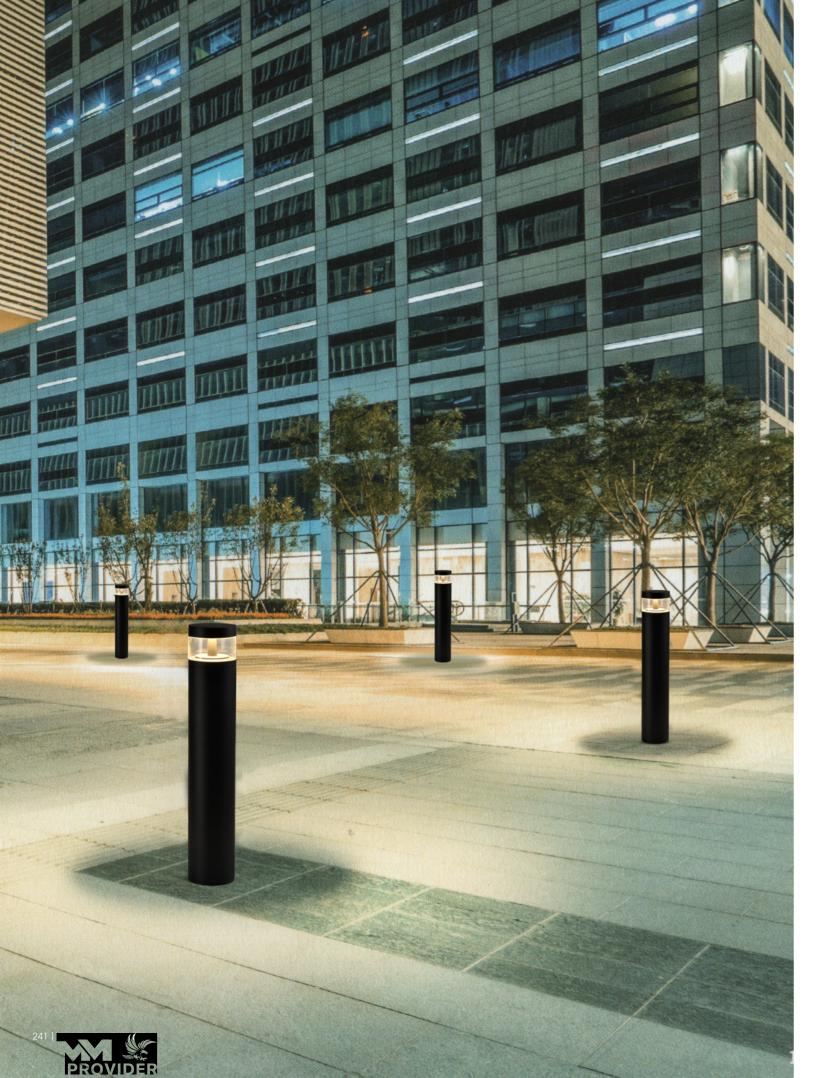



DHD-6174 / DHD-6175

Height bollard, for outdoor installation. Matt grey/Matt black anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 7-15W.

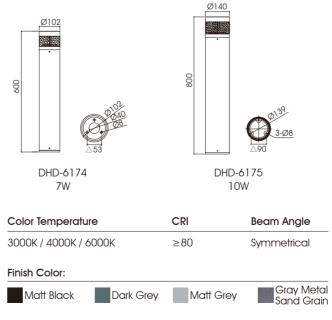


Technical Features

Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PMMA
Finishing	Matt grey/Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	7W/10W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

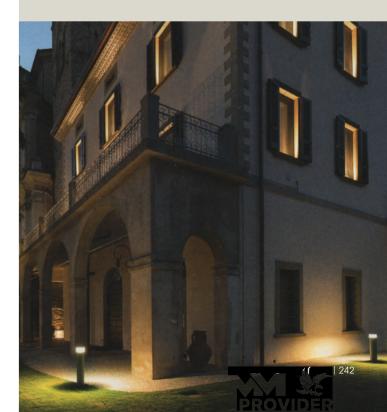



DHD-6176 / DHD-6177

For outdoor installation. Matt black / Dark grey anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 10-15W.

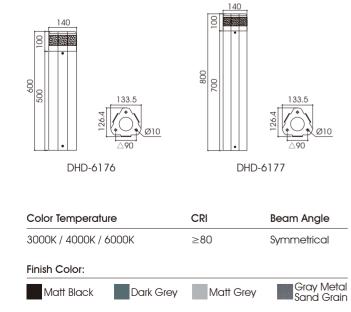

PROVIDER

Technical Features




Available On Request



Technical Data

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC
Finishing	Matt black/Dark gery
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	15W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off



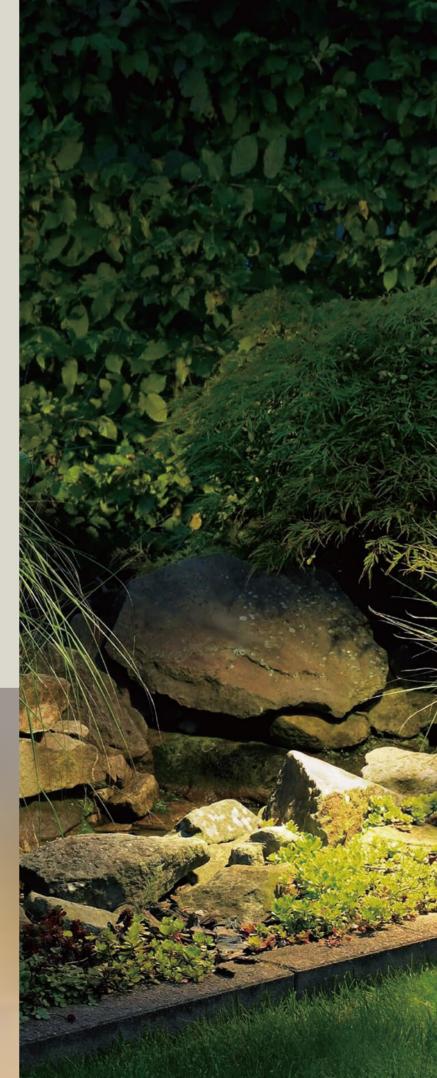


244



DHD-6178 / DHD-6179

For outdoor installation. Dark grey anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 7-12W.

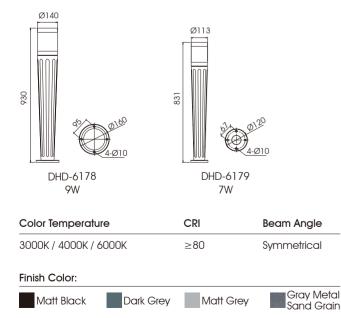

Technical Features



Available On Request




Technical Data Material Aluminum Coating Anti-corrosion and UV-proof powder coating Diffuser Frosted PC Finishing Dark grey Reflector Professional optical reflector Made of thermostable silica gel to improve Thermostable protection class silica gel Stainless steel Screws Lamp LED 7W / 9W Wattage Power Supply AC100-277V 50/60Hz On/Off Type





DHD-6180 / DHD-6181

For outdoor surface installation, 360° light emission. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 7-15W.





Color Temperature		CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain



Technical Features

Available On Request




Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear PC
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	10W/15W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off





700mm height bollard, for outdoor installation. Dark grey anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 6W.



Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥80	Asymmetrical
Finish Color:		
Matt Black Dark Grey	Matt Grey	Gray Metal Sand Grain

Technical Features



Available On Request




Technical Data		
Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Opal PC	
Finishing	Dark grey	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	6W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	





DHD-6183

1000mm height bollard, for outdoor installation. Dark grey anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver 100-277V 50/60Hz. Wattage Range 10-15W.



Color Temperature 3000K / 4000K / 6000K		CRI	Beam Angle
		≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain




Technical Features

Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	10W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off

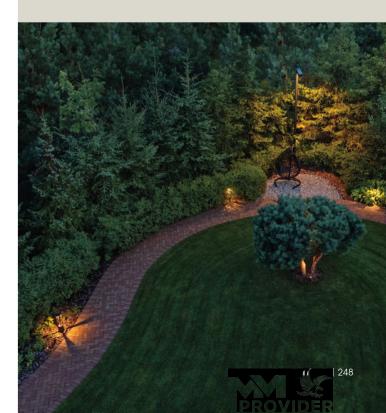




WALL LIGHT SERIES

-





For outdoor installation. Dark grey anti-corrosion and UV-proof powder coating. PMMA diffuser, and stainless steel screws. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 14W.



Color Temperate	lite	CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Asymmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain

Technical Features

Available On Request




Material	Stainless steel
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Opal PMMA
Finishing	Dark grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	14W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off







For outdoor installation. Matt black anti-corrosion and UV-proof powder coating. Polycarbonate diffuser, and stainless steel screws. Built-in LED driver AC220-240V 50/60Hz. Wattage Range 5.8W.



Color Temperature		CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Asymmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain


PROVIDER

Technical Features



Available On Request



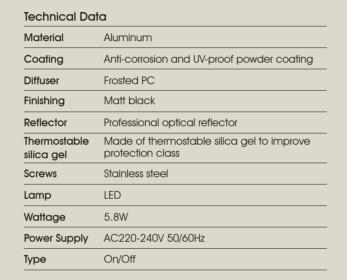






DHD-6186

For outdoor installation. Matt black anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Built-in LED driver AC220-240V 50/60Hz. Wattage Range 8.5W.



Color Temperature		CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Asymmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain

Technical Features




Available On Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted tempered glass
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	8.5W
Power Supply	AC220-240V 50/60Hz
Туре	On/Off






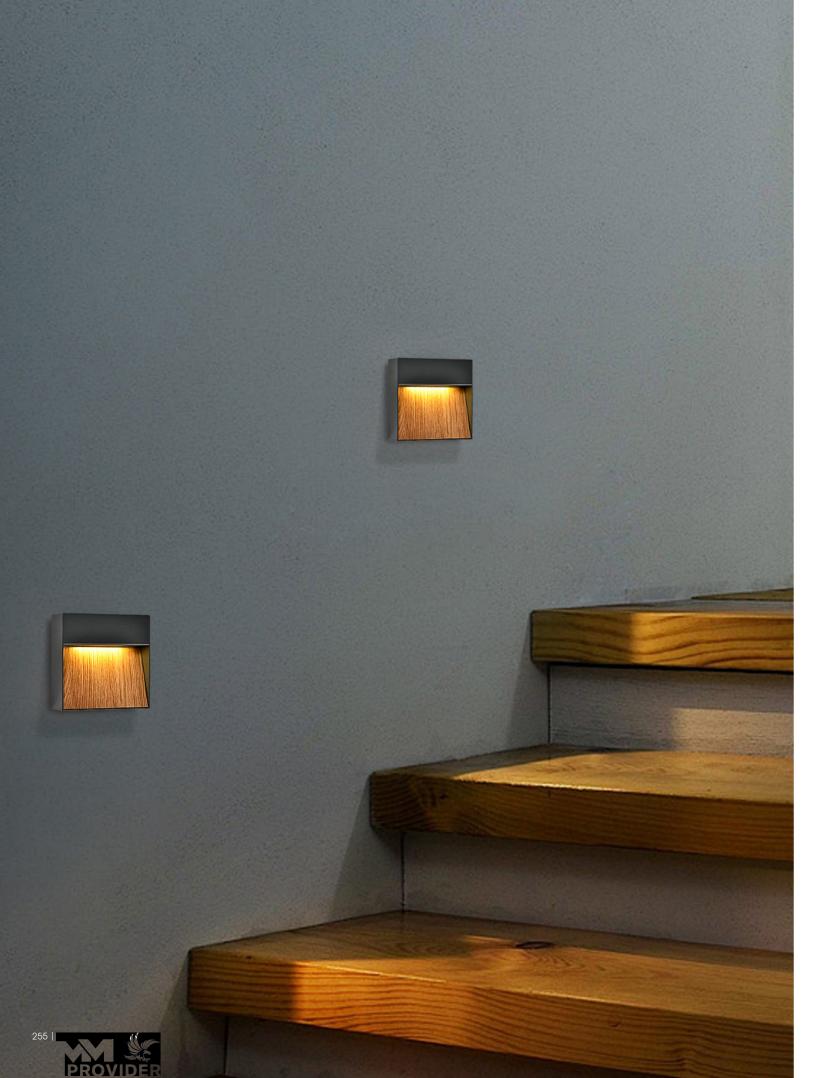



DHD-6187 / DHD-6188

For outdoor installation. Timber finish+Dark grey/Matt black anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 4W.



Color Temperature		CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Asymmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain

Technical Features

Available On Request



Material	Stainless steel
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Frosted tempered glass
Finishing	Dark grey/Matt black+Timber finish
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	4W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off



DHD-6188





DHD-6189 / DHD-6190

For outdoor installation. Matt grey anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 7-24W.





DHD-6189 COB 20W

DHD-6190 COB 2x12W


Color Temperature CRI Beam Angle 3000K / 4000K / 6000K ≥80 Symmetrical Finish Color: Gray Metal Sand Grain Matt Black Dark Grey Matt Grey

Technical Features



Available On Request



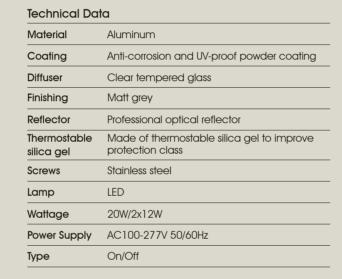





DHD-6191 / DHD-6192

For outdoor installation. Matt grey anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 12-24W.



DHD-6191 12W

DHD-6192 2x12W

Color Temperature		CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Symmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain



Technical Features



Available On Request




Technical Data		
Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Clear tempered glass	
Finishing	Matt grey	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	12W/2x12W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	





DHD-6193/DHD-6194/DHD-6195

For outdoor installation. Matt grey anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 10-32W.

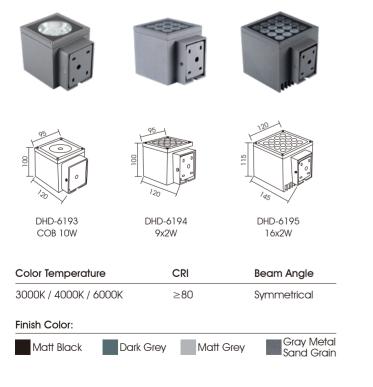


Technical Features



Available On Request



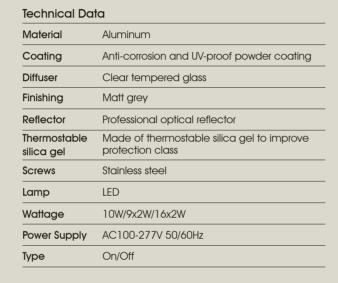






DHD-6196/DHD-6197/DHD-6198

For outdoor installation. Matt grey anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Anchorage bolts included. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 10-32W.

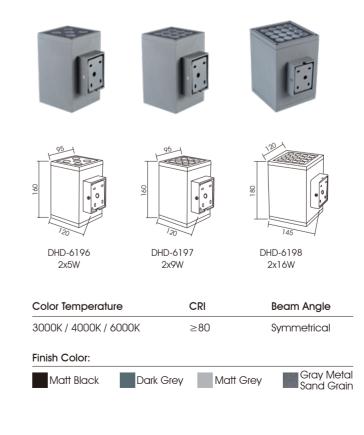



Technical Features


IK08

Available On Request





Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Clear tempered glass	
Finishing	Matt grey	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	2x5W/2x9W/2x16W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	

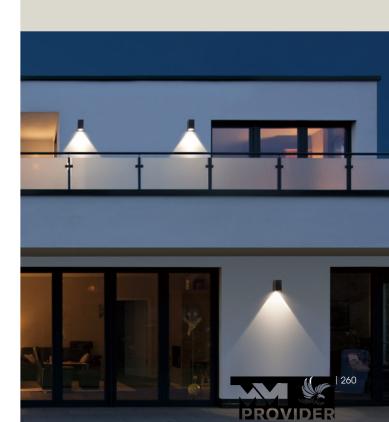



For outdoor installation. Matt black anti-corrosion and UV-proof powder coating. Glass diffuser, and stainless steel screws. Built-in LED driver AC100-277V 50/60Hz. Wattage Range 5W.

Color Temperature		CRI	Beam Angle
3000K / 4000K / 6000K		≥80	Asymmetrical
Finish Color:			
Matt Black	Dark Grey	Matt Grey	Gray Metal Sand Grain


Technical Features



Available On Request



Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Clear tempered glass	
Finishing	Matt black	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	5W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	

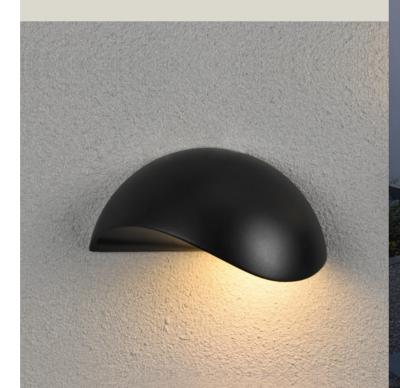







SPOT LIGHT SERIES



DHD-6200 / DHD-6201 DHD-6202 / DHD-6203


For outdoor surface installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating. Glass diffuser. Built-in LED driver AC220-240V 50/60Hz, Wattage Range 5-30W.

Accessories:



Honeycomb Louver 45°anti-glare Hood

Spike Mounted



Dimension	Power	Beam Angle
Ø50mm	5W	15° / 23° / 38°
Ø64mm	10W	15° / 23° / 38° / 45° / 60°
Ø76mm	15W	15° / 23° / 38° / 45° / 60°
Ø90mm	20W	15° / 23° / 38° / 45° / 60°
Ø108mm	30W	15° / 23° / 38° / 45° / 60°

Technical Features



Available on Request



Technical Data

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Glass
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	5W / 10W / 15W / 20W / 30W
Power Supply	AC220-240V 50/60Hz
Туре	On/Off
CRI	≥80
CCT	3000K / 4000K / 6000K





DHD-6204

DHD-6204 / DHD-6205 DHD-6206 / DHD-6207

For outdoor surface installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating. Glass diffuser. Built-in LED driver AC220-240V 50/60Hz, Wattage Range 10-30W.

Accessories:



Honeycomb Louver




45°anti-glare Hood





30W

10W



Dimension	Power	Beam Angle
Ø64mm	10W	15° / 23° / 38° / 45° / 60°
Ø76mm	15W	15° / 23° / 38° / 45° / 60°
Ø90mm	20W	15° / 23° / 38° / 45° / 60°
Ø108mm	30W	15° / 23° / 38° / 45° / 60°

Technical Features



Available on Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Glass
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	10W / 15W / 20W / 30W
Power Supply	AC220-240V 50/60Hz
Туре	On/Off
CRI	≥80
ССТ	3000K / 4000K / 6000K





DHD-6208 / DHD-6209

For outdoor surface installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating. Glass diffuser. Built-in LED driver AC100-277V 50/60Hz, Wattage Range 10W.


Accessories:



Honeycomb Louver 45°anti-glare Hood







DHD-6208A

Model No.

08A DHD-6208B

DHD-6209A	DHD-6209B
Poge Anglo	

Nodel No.	1000	bedin Angle
DHD-6208A	10W	13° / 25°
DHD-6208B	5x2W	10° / 15° / 24° / 30° / 45° / 60°
DHD-6209A	10W	13° / 25°
DHD-6209B	5x2W	10° / 15° / 24° / 30° / 45° / 60°



Technical Features

IKO8 IP65	
-----------	--

Available on Request



Technical Data

Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Clear tempered glass	
Finishing	Matt grey	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	10W/5x2W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	
CRI	≥80	
ССТ	3000K / 4000K / 6000K	





DHD-6210B

DHD-6210 / DHD-6211


For outdoor installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating. Glass diffuser. Built-in LED driver AC100-277V 50/60Hz, Wattage Range 10W.


Accessories:



Honeycomb Louver

45°anti-glare Hood





DHD-6210A

DHD-6210B

DHD-6211A DHD-6211B

Model No.	Power	Beam Angle
DHD-6210A	10W	13° / 25°
DHD-6210B	5x2W	10° / 15° / 24° / 30° / 45° / 60°
DHD-6211A	10W	13° / 25°
DHD-6211B	5x2W	10° / 15° / 24° / 30° / 45° / 60°

DHD-6209B

Technical Features



Available on Request



Technical Data

Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Clear tempered glass	
Finishing	Matt grey	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	10W/5x2W	
Power Supply	AC100-277V 50/60Hz	
Туре	On/Off	
CRI	≥80	
ССТ	3000K / 4000K / 6000K	





DHD-6211A

PROVIDER


268



For outdoor installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating. Glass diffuser. Built-in LED driver AC220-240V 50/60Hz, Wattage Range 10W.

Opation: R / S / M DHD-6212S DHD-6212M DHD-6212RT Accessories: Spike Mounted Honeycomb Louver 45°anti-glare Hood





Model No. Power Beam Angle 15° / 24° / 38° / 60° / 15*60° DHD-6212 10W

Technical Features

IKO8 IP65	
-----------	--

Available on Request



Technical Data

Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Clear tempered glass	
Finishing	Matt Black	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	10W	
Power Supply	AC220-240V 50/60Hz	
Туре	On/Off	
CRI	≥80	
CCT	3000K / 4000K / 6000K	





DHD-6213

For outdoor installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating. Glass diffuser. Built-in LED driver AC220-240V 50/60Hz, Wattage Range 2.8W.

Opation: R / S / M DHD-6213RT DHD-6213S DHD-6213M Accessories: Spike Mounted Honeycomb Louver 45°anti-glare Hood D Model No. Power Beam Angle 10° / 15° / 2 5° / 45 / 60° / 10*60° DHD-6213 2.8W

Technical Features



Available on Request




Material	Aluminum	
Coating	Anti-corrosion and UV-proof powder coating	
Diffuser	Clear tempered glass	
Finishing	Matt Black	
Reflector	Professional optical reflector	
Thermostable silica gel	Made of thermostable silica gel to improve protection class	
Screws	Stainless steel	
Lamp	LED	
Wattage	2.8W	
Power Supply	AC220-240V 50/60Hz	
Туре	On/Off	
CRI	≥80	
ССТ	3000K / 4000K / 6000K	







For outdoor installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating. Glass diffuser. Built-in LED driver AC100-277V 50/60Hz, Wattage Range 2.8-25W.

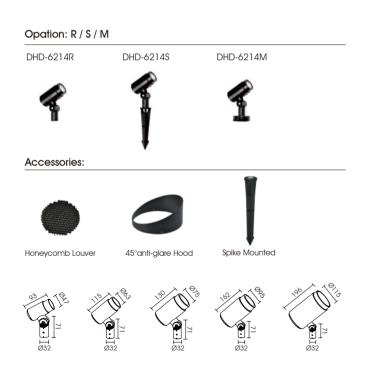

Dimension	Power	Beam Angle
Ø47mm	2.8W	10° / 15° / 25° / 45° / 60° / 15*60°
Ø63mm	7W	10° / 15° / 25° / 45° / 60° / 15*60°
Ø75mm	10W	15° / 24° / 38° / 60° / 15*60°
Ø95mm	15W	15° / 24° / 38° / 60° / 15*60°
Ø115mm	25W	15° / 24° / 38° / 60° / 15*60°



Technical Features



Available on Request



Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Matt Black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	2.8W/7W/10W/15W/25W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off
CRI	≥80
ССТ	3000K / 4000K / 6000K









DHD-6215/DHD-6216/DHD-6217/ DHD-6218/DHD-6219/DHD-6220/ DHD-6221

For outdoor installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating. Glass diffuser. Built-in LED driver AC100-277V 50/60Hz, Wattage Range 10-50W.

Technical Features



Available on Request





DHD-6216



Ø140

Accessories:














Tree Mounted

Honeycomb Louver 45°anti-glare Hood

Spike Mounted





50W

Dimension Power Beam Angle Ø80mm 10W 25° / 60° Ø100mm 20W 25° / 38° / 60° Ø120mm 30W 25° / 35° Ø140mm 50W 25° / 60°

Technical Data Aluminum Material Coating Anti-corrosion and UV-proof powder coating Clear tempered glass Diffuser Dark grey Finishing Professional optical reflector Reflector Made of thermostable silica gel to improve Thermostable protection class silica gel Screws Stainless steel LED Lamp 10W / 20W / 30W / 50W Wattage Power Supply AC100-277V 50/60Hz On/Off Type IP Rating IP65 CRI ≥80 CCT 3000K / 4000K / 6000K

Garden Stake





Pole Mounted DHD-6215



Ø89











DHD-6219

DHD-6220

DHD-6221





DHD-6222/DHD-6223/DHD-6224/ DHD-6225/DHD-6226

For outdoor installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating. Glass diffuser. Built-in LED driver AC100-277V 50/60Hz, Wattage Range 18-60W.

Technical Features



Available on Request






Accessories:



Honeycomb Louver

45°anti-glare Hood

Spike Mounted Tree Mounted



Dimension	Power	Beam Angle
Ø132mm	18W	5° / 15° / 25° / 45° / 60° / 90°
Ø160mm	32W	5° / 15° / 25° / 45° / 60° / 90°
Ø190mm	36W	5° / 15° / 25° / 45° / 60° / 90°
Ø230mm	60W	5° / 15° / 25° / 45° / 60° / 90°

36W

Technical Da	ta
Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Martt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	18W / 32W / 36W / 60W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off
IP Rating	IP65
CRI	≥80
ССТ	3000K / 4000K / 6000K

Garden stake





Pole Mounted DHD-6222



Ø89

Ø132





Ø190



А



В



Ground Mounted





DHD-6225

DHD-6226








180W

DHD-6227 / DHD-6228

For outdoor installation. Matt grey anti-corrosion and UV-proof powder coating. Glass diffuser. Built-in LED driver AC100-277V 50/60Hz, Wattage Range 180W.

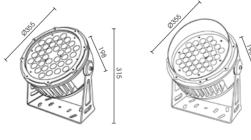

DHD-6227



Model No.	Power	Beam Angle	
DHD-6227	36x5W	3° / 5°	
DHD-6228	36x5W	3° / 5°	

Technical Features



Available on Request



Technical Data	
Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Matt grey
Reflect or	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	36x5W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off
IP Rating	IP65





For outdoor installation. Matt grey anti-corrosion and UV-proof powder coating. Glass diffuser. Built-in LED driver AC100-277V 50/60Hz, Wattage Range 24-96W.



Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥80	3° / 5°

PROVIDER


Technical Features



Available on Request




Technical Da	ta
Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Matt grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	24x4W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off
IP Rating	IP65

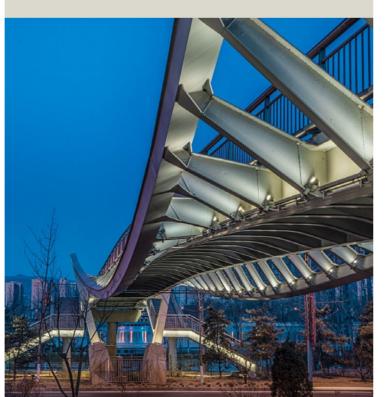



DHD-6230

For outdoor installation. Matt black anti-corrosion and UV-proof powder coating. Glass diffuser. Built-in LED driver AC100-277V 50/60Hz, Wattage Range 54-108W.



Color Temperature	CRI	Beam Angle
3000K / 4000K / 6000K	≥80	10° / 15° /24° / 30° /45° / 60°

Technical Features



Available on Request





Technical Data


Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Matt black
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	54x2W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off
IP Rating	IP65







DHD-6231 / DHD-6232

For outdoor installation. Matt grey anti-corrosion and UV-proof powder coating. Glass diffuser. Built-in LED driver AC100-277V 50/60Hz, Wattage Range 5W.







DHD-6231

DHD-6232

Model No.	Power	Beam Angle
DHD-6231	5x1W	10°/15°/24°/30°/45°/60°
DHD-6232	5x1W	10°/15°/24°/30°/45°/60°

PROVIDER

Technical Features



Available on Request



Technical Data


Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Matt grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	5x1W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off
IP Rating	IP65
CRI	≥80
CCT	3000K / 4000K / 6000K






DHD-6233 / DHD-6234

For outdoor installation. Matt grey anti-corrosion and UV-proof powder coating. Glass diffuser. Built-in LED driver AC100-277V 50/60Hz, Wattage Range 18W.





DHD-6233

DHD-6234

Model No.	Power	Beam Angle
DHD-6233	18x1W	10°/15°/24°/30°/45°/60°
DHD-6234	18x1W	10°/15°/24°/30°/45°/60°

Technical Features



Available on Request



Technical Data

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Matt grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	18x1W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off
IP Rating	IP65
CRI	≥80
ССТ	3000K / 4000K / 6000K





282



DHD-6235 / DHD-6236

For outdoor installation. Matt grey anti-corrosion and UV-proof powder coating. Glass diffuser. Built-in LED driver AC100-277V 50/60Hz, Wattage Range 20W.





DHD-6235

DHD-6236

Model No.	Power	Beam Angle
DHD-6235	4x5W	3° / 5°
DHD-6236	4x5W	3° / 5°

PROVIDER

Technical Features



Available on Request



Technical Data


Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Matt grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	4x5W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off
IP Rating	IP65
CRI	≥80
CCT	3000K / 4000K / 6000K





DHD-6237 / DHD-6238

For outdoor installation. Matt grey anti-corrosion and UV-proof powder coating. Glass diffuser. Built-in LED driver AC100-277V 50/60Hz, Wattage Range 25W.



DHD-6237

DHD-6238

Model No.	Power	Beam Angle
DHD-6237	5x5W	3° / 5°
DHD-6238	5x5W	3° / 5°

Technical Features



Available on Request



Technical Data

Material	Aluminum
Coating	Anti-corrosion and UV-proof powder coating
Diffuser	Clear tempered glass
Finishing	Matt grey
Reflector	Professional optical reflector
Thermostable silica gel	Made of thermostable silica gel to improve protection class
Screws	Stainless steel
Lamp	LED
Wattage	5x5W
Power Supply	AC100-277V 50/60Hz
Туре	On/Off
IP Rating	IP65
CRI	≥80
ССТ	3000K / 4000K / 6000K










DHD-6239/DHD-6240 3W

For outdoor installation, Made of high-quality aluminium and stainless steel. Glass diffuser. Wattage Range 3W.

DHD-6239 Underground Light Opation:



DHD-6240 Underground Light Opation:

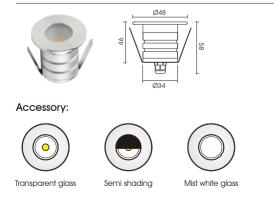

PROVID

Technical Features



Available On Request



Technical Data

Material	Stainless steel cover+aluminum body
Diffuser	Frosted tempered glass
Screws	Stainless steel
Lamp	LED
Wattage	3W
Input	DC12V/24V
ССТ	3000K/4000K/6000K
CRI	≥80
Туре	On/Off




DHD-6241/DHD-6242 1W / 3W


For outdoor installation, Made of high-quality aluminium and stainless steel. Glass diffuser. Wattage Range 1W, 3W.



DHD-6241 Underground Light Opation:

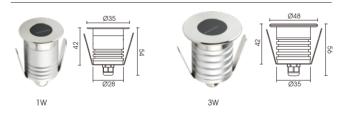

DHD-6242 Underground Light Opation:

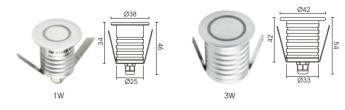

Technical Features



Available On Request



Technical Data

Material	Stainless steel cover+aluminum body
Diffuser	Frosted tempered glass
Screws	Stainless steel
Lamp	LED
Wattage	1W/3W
Input	DC12V/24V
ССТ	3000K/4000K/6000K
CRI	≥80
Туре	On/Off




PROVIDER



For outdoor installation, Made of high-quality aluminium. Glass diffuser. Wattage Range 3W.

Dimension:





Technical Features




Available On Request



Technical Data

Material	Aluminum
Diffuser	Anti-corosion and Uv-proof powder coating
Screws	Tempered glass
Lamp	LED
Wattage	3W
Input	DC12V/24V
ССТ	3000K/4000K/6000K
CRI	≥80
Туре	On/Off

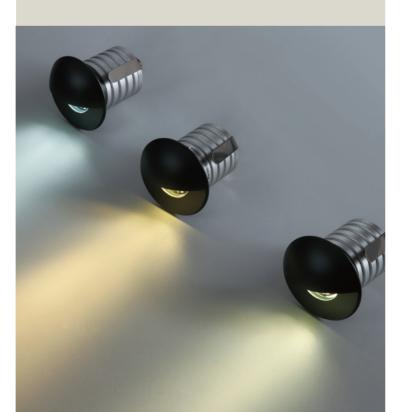



DHD-6244A AC220-240V 2.8W Optional DC24V 2.3W optional

DHD-6244

For outdoor installation, Made of high-quality stainless steel cover and aluminium body. Tempered glass diffuser. Suitable for underground light.

Underground Light Opation:





DHD-6244A-E





DHD-6244A-FR



DHD-6244A-HL

DHD-6244A-HS

DHD-6244B-FR







DHD-6244C-S1

DHD-6244C-\$2

DHD-6244C-S4

Underground Light Accessroy: Sleeve

















Technical Features



Available On Request



Technical Data

Material	Stainless steel Cover+aluminum Body
Diffuser	PC/Tempered glass
Screws	Stainless steel
Lamp	LED
Wattage	2.3-2.8W
Input	DC 24V / AC220-240V
ССТ	2700K/3000K/4000K/5700K
CRI	≥80
Туре	On/Off

Item No.	Beam Angle
DHD-6244A	10°/15°/25°/45°/60°/10*60°/ASY/90°
DHD-6244B	10°/15°/25°/45°/60°/10*60°/ASY/90°
DHD-6244C	1/2/4-Side Lighting



DHD-6244C AC220-240V 2.8W Optional DC24V 2.3W Optional






For outdoor installalion, Made of high-guality stainless steel cover and GN. body, Tempered glass diffuser, suitaible for underground light.


Underground Light Opation:



Dimension:



Underground Light Accessroy: Sleeve



PROVID

Technical Features



Available On Request



Technical Data

Material	Stainless steel cover+ GN. body
Coating	Anti-corrosion and Uyproof powder coating
Diffuser	Tempered glass
Screws	Stainless steel
Lamp	LED
Wattage	1.5-7.8W
Input	AC 220-240V/DC 24V
CCT	3000K/4000K/6000K
CRI	≥80
Туре	On/Off

Item No.	Wattage	Beam Angle
DHD-6245A	1.5W DC24V	10°/15°/25°/45°/60°/ 10*60°/ASY/75°
DHD-6245B	2.3W DC24V 2.8W AC220-240V	10°/15°/25°/45°/60°/ 10*60°/ASY/90°
DHD-6245C	4.5W DC24V 4.8W AC220-240V	10°/15°/24°/36°/60°/ ASY/90°
DHD-6245D	7.5W DC24V 7.8W AC220-240V	10°/15°/24°/36°/60°/ ASY/90°





DHD-6246A AC220-240V 5.8W(9W) Optional

DC24V 6W(9W) optional

DHD-6246

For outdoor installation, Made of high-quality stainless steel cover and aluminium body. Tempered glass diffuser. Suitable for underground light.

Underground Light Opation:





DHD-6246A-FS







DHD-6246A-HL

DHD-6246A-GL

DHD-6246A-CS








DHD-6246B-S1

DHD-6246B-S4

Underground Light Accessroy: Sleeve

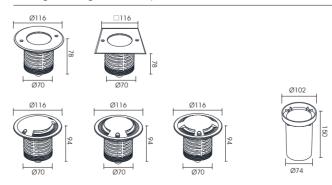

Technical Features



Available On Request



Technical Data

Material	Stainless steel cover+aluminum body
Coating	Anti-corrosion and Uyproof powder coating
Diffuser	PC/Tempered glass
Screws	Stainless steel
Lamp	LED
Wattage	5.8-9W
Input	AC 220-240V/DC 24V
ССТ	3000K/4000K/6000K
CRI	≥80
Туре	On/Off

Item No.	Beam Angle
DHD-6246A	10°/15°/25°/45°/60°/10*60°/ASY/120°
DHD-6246B	1/2/4-Side Lighting



DHD-6246B

AC220-240V 7W Optional DC24V 6W Optional





For outdoor installarion, Made of high-guality stainless steel cover and aluminum body, Polycarbonate/Glass diffuser. Suitable for underground light, Available accessories: Honeycomb louver.

Underground Light Opation: CL / FR / HL / GL









DHD-6247B








DHD-6247C-CL DHD-6247C-FR



Underground Light Accessroy: Sleeve



Technical Features



Available On Request



Technical Data

Material	Stainless steel cover+aluminum body
Coating	Anti-corrosion and Uyproof powder coating
Diffuser	PC/Tempered glass
Screws	Stainless steel
Lamp	LED
Wattage	5.8-8.5W
Input	AC 220-240V/DC 24V
CCT	3000K/4000K/6000K
CRI	≥80
Туре	On/Off

Item No. Beam Angle DHD-6247A $10^{\circ}/25^{\circ}/45^{\circ}/60^{\circ}/10*60^{\circ}$, Tilt $\pm 25^{\circ}$ DHD-6247B 1/2/4-Side Lighting 10°/15°/25°/45°/60°/10*60°, ASY/120° DHD-6247C



DHD-6247B AC220-240V 8.5W DC24V8W




DHD-6248

For outdoor installarion, Made of high-guality stainless steel cover and aluminum body, Glass diffuser. Suitable for underground light, Available accessories: Honeycomb louver.

Underground Light Opation: CL / FR / HL / GL



Underground Light Accessroy: Sleeve





Technical Features



Available On Request



Technical Data

Material	Stainless steel cover+aluminum body
Coating	Anti-corrosion and Uyproof powder coating
Diffuser	Tempered glass
Screws	Stainless steel
Lamp	LED
Wattage	23-24W
Input	AC 220-240V/DC 24V
CCT	3000K/4000K/6000K
CRI	≥80
Туре	On/Off
Beam Angle	10°/15°/25°/45°/60°/10*60°, ASY/120°



AC220-240V 23W Optional DC24V 24W [12(COB 1) pcs] Optional







DHD-6249A AC 220-240V 7W(Dual Tilt 9W) Optional DC 24V 6W(Dual Tilt 8W) Optional

DHD-6249

For outdoor installation, Made of high-quality stainless steel cover and aluminum body. Glass diffuser. Suitable for down light or underground light, also can dual tilt $\pm 30^{\circ}$. 1T or 2T Tilt optional, Available accessories: Honeycomb louver.

Down light / Underground Light Tilt option: 1T/2T

DHD-6249A-1T DHD-6249A-2T



Down light / Underground Light Tilt option: CL / FR / COB


DHD-6249B-CL DHD-6249B-FR



Down Light Accessroy:Clip



Underground Light Accessroy:Sleeve







Technical Features



Available On Request



Technical Data

Material	Stainless steel cover+aluminum body
Coating	Anti-corrosion and Uyproof powder coating
Diffuser	Tempered glass
Screws	Stainless steel
Lamp	LED
Wattage	6-10W
Input	AC 220-240V/DC 24V
ССТ	3000K/4000K/6000K
CRI	≥80
Туре	On/Off

Item No.	Beam Angle
DHD-6249A	10°/15°/25°/45°/60°/10*60°, Tilt ±30°
DHD-6249B	10°/15°/25°/45°/60°/10*60°, ASY/120°



DHD-6249B

AC220-240V 7W(COB 10W) Optional DC24V 6W(COB 10W) Optional





AC 220-240V 12W(Dual Tilt 15W) Optional DC 24V 11W(Dual Tilt 14W) Optional

DHD-6250

For outdoor installation, Made of high-quality stainless steel cover and aluminium body. Glass diffuser. Suitable for down light or underground light, also can dual tilt $\pm 30^{\circ}$. 1T or 2T Tilt optional, Available accessories: Honeycomb louver.

Down light / Underground Light Tilt option: 1T/2T





Down light / Underground Light Tilt option: CL / FR / COB








Down Light Accessroy:Clip



Underground Light Accessroy:Sleeve



Technical Features



Available On Request



Technical Data

Material	Stainless steel cover+aluminum body
Coating	Anti-corrosion and Uyproof powder coating
Diffuser	Tempered glass
Screws	Stainless steel
Lamp	LED
Wattage	11-16W
Input	AC20-240V/DC 24V
ССТ	3000K/4000K/6000K
CRI	≥80
Туре	On/Off

Item No.	Beam Angle
DHD-6250A	10°/15°/25°/45°/60°/10*60°, Tilt ±30°
DHD-6250B	10°/15°/25°/45°/60°/10*60°, ASY/120°



DHD-6250B AC220-240V 15W(COB 16W) Optional DC24V 14W(COB 15W) Optional



DHD-6251A AC220-240V 25W(COB 30W) Optional

DC24V 24W(COB 30W) Optional

DHD-6251

For outdoor installation, Made of high-quality stainless steel cover and aluminium body. Glass diffuser. Suitable for down light or underground light, also can dual tilt $\pm 30^{\circ}$. 11 or 21 Tilt optional, Available accessories: Honeycomb louver.

Down light / Underground Light Tilt option: 1T/2T

DHD-6251A-1T DHD-6251A-2T



Down light / Underground Light Tilt option: CL / FR / COB





Down Light Accessroy:Clip



Underground Light Accessroy:Sleeve







Ø147



Technical Features



Available On Request



Technical Data

Material	Stainless steel cover+aluminum body
Coating	Anti-corrosion and Uyproof powder coating
Diffuser	Tempered glass
Screws	Stainless steel
Lamp	LED
Wattage	18-31W
Input	AC20-240V/DC 24V
ССТ	3000K/4000K/6000K
CRI	≥80
Туре	On/Off

Item No.	Beam Angle
DHD-6251A	10°/15°/25°/45°/60°/10*60°, Tilt ±30°
DHD-6251B	10°/15°/25°/45°/60°/10*60°, ASY/120°



DHD-6251B

AC220-240V 25W(COB 31W) Optional DC24V 24W(COB 30W) Optional





AC 220-240V 7W(Dual Tilt 9W) Optional DC 24V 6W(Dual Tilt 8W) Optional

DHD-6252

For outdoor installation, Made of high-quality stainless steel cover and aluminium body. Glass diffuser. Suitable for down light or underground light, also can dual tilt $\pm 30^{\circ}$. 11 or 21 Tilt optional, Available accessories: Honeycomb louver.

Down light / Underground Light Tilt option: 1T/2T



Down light / Underground Light Tilt option: CL / FR / COB






Down Light Accessroy:Clip



Underground Light Accessroy:Sleeve



Technical Features



Available On Request



Technical Data

Material	Stainless sieel cover+ aluminum body
Coating	Anti-corrosion and Uyproof powder coating
Diffuser	Tempered glass
Screws	Stainless steel
Lamp	LED
Wattage	8-11W
Input	AC20-240V/DC 24V
ССТ	3000K/4000K/6000K
CRI	≥80
Туре	On/Off

Beam Angle
10°/15°/25°/45°/60°/10*60°, Tilt ±30°
10°/15°/25°/45°/60°/10*60°, ASY/120°



DHD-6252B AC220-240V 9W(COB 11W) Optional DC24V 8W(COB 10W) Optional



DHD-6253A AC 220-240V 12W(Dual Tilt 15W) Optional DC 24V 11W(Dual Tilt 14W) Optional

DHD-6253


For outdoor installation, Made of high-quality stainless steel cover and aluminium body. Glass diffuser. Suitable for down light or underground light, also can dual tilt $\pm 30^{\circ}$. 11 or 21 Tilt optional, Available accessories: Honeycomb louver.

Down light / Underground Light Tilt option: 1T/2T



DHD-6253A-1T

Down light / Underground Light Tilt option: CL / FR / COB





DHD-6253B-CL

DHD-6253B-COB

Down Light Accessroy:Clip



Underground Light Accessroy:Sleeve







Technical Features




Available On Request



Technical Data

Material	Stainless steel cover+aluminum body
Coating	Anti-corrosion and Uyproof powder coating
Diffuser	Tempered glass
Screws	Stainless steel
Lamp	LED
Wattage	11-20W
Input	AC20-240V/DC 24V
ССТ	3000K/4000K/6000K
CRI	≥80
Туре	On/Off
-	

Item No.	Beam Angle
DHD-6253A DHD-6253B	10°/15°/25°/45°/60°/10*60°, Tilt ±30° 10°/15°/25°/45°/60°/10*60°, ASY/120°
DHD-6253B	10°/15°/25°/45°/60°/10*60°, ASY/120°



DHD-6253B

AC220-240V 19W(COB 20W) Optional DC24V 18W(COB 20W) Optional





























